

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 024 225 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
02.08.2000 Bulletin 2000/31

(51) Int. Cl. 7: D21H 13/08

(21) Application number: 00300847.5

(22) Date of filing: 28.01.2000

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: 29.01.1999 JP 2201699
06.10.1999 JP 28565599
21.01.2000 JP 2000012658

(71) Applicant: UNI-CHARM CORPORATION
Kawanoe-shi Ehime-ken (JP)

(72) Inventors:
• Shimizu, Jyoji,
c/o Technical Center
Mitoyo-gun, Kagawa-ken 769-1602 (JP)


- Okada, Kazuya,
c/o Technical Center
Mitoyo-gun, Kagawa-ken 769-1602 (JP)
- Tanio, Toshiyuki,
c/o Technical Center
Mitoyo-gun, Kagawa-ken 769-1602 (JP)
- Takeuchi, Naohito
c/o Technical Center
Mitoyo-gun, Kagawa-ken 769-1602 (JP)
- Konishi, Takayoshi,
c/o Technical Center
Mitoyo-gun, Kagawa-ken 769-1602 (JP)

(74) Representative:
Parry, Christopher Stephen
Saunders & Dolleymore,
9 Rickmansworth Road
Watford, Herts. WD1 7HE (GB)

(54) Fibrillated rayon-containing, water-decomposable fibrous sheet

(57) Conventional water-decomposable fibrous sheets for cleaning sheets capable of being disposed of in toilets and others do not have well-balanced decomposability in water and strength. The water-decomposable fibrous sheet containing from 5 to 100 % by mass of fibrillated rayon having a fiber length of at most 10 mm and having a degree of beating of at most 700 cc, optionally along with other fibers having a length of at most 10 mm, has good decomposability in water and high wet strength. When subjected to water-jetting treatment, it becomes more bulky to have a soft feel.

Fig. 2

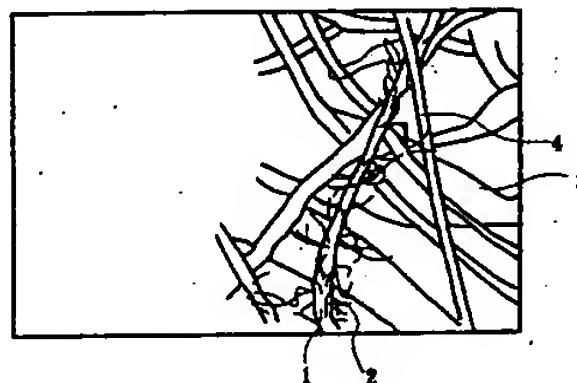

EP 1 024 225 A1

Description

BACKGROUND OF THE INVENTION

5 FIELD OF THE INVENTION

[0001] The present invention relates to a water-decomposable fibrous sheet capable of being readily decomposed and dispersed in water flow. More precisely, it relates to a water-decomposable fibrous sheet having high strength in dry and wet but capable of being readily decomposed in water.

10

DESCRIPTION OF THE RELATED ART

[0002] To wipe the skin of human bodies including the private parts thereof, or to clean toilets and thereabouts, used are cleaning sheets made of paper or non-woven fabric. The cleaning sheets must be decomposable in water so that they could be directly disposed of in toilets after their use. This is because, if hardly water-decomposable cleaning sheets are disposed of in toilets after their use, they will take a lot of time until they are decomposed and dispersed in septic tanks, or will clog the drainpipes around toilets.

[0003] For easy and effective use, many disposable cleaning sheets for wiper applications are packaged while being wetted with a detergent chemical or the like, and are put on the market. Such cleaning sheets must have high strength in wet to such a degree that they are well fit for wiping with them containing a detergent chemical or the like, but must well decompose in water after they are disposed of in toilets.

[0004] For example, Japanese Patent Publication No. 24636/1995 discloses a water-decomposable cleaning article that comprises a carboxyl group-having, water-soluble binder, a metal ion and an organic solvent. However, the metal ion and the organic solvent irritate the skin.

[0005] Japanese Patent Laid-Open No. 292924/1991 discloses a water-decomposable cleaning article of polyvinyl alcohol-containing fibers with an aqueous solution of boric acid infiltrated therein; and Japanese Patent Laid-Open No. 198778/1994 discloses a water-decomposable napkin of polyvinyl alcohol-containing non-woven fabric with a borate ion and a bicarbonate ion introduced therein. However, polyvinyl alcohol is not resistant to heat, and therefore the wet strength of the water-decomposable cleaning article and the water-decomposable napkin is lowered at 40°C or higher. Recently, various water-decomposable absorbent articles including sanitary napkins, panty liners, disposable diapers and others have been investigated in the art. In view of their safety, however, the water-decomposable fibrous sheets mentioned above could not be used as the top sheets for those absorbent articles that shall be kept in direct contact with the skin for a long period of time, as they contain a binder and an electrolyte.

[0006] On the other hand, Japanese Patent Laid-Open No. 228214/1997 discloses a water-degradable non-woven fabric having a wet strength of from 100 to 800 gf/25 mm as measured according to JIS P-8135, which is produced by mixing fibers having a length of from 4 to 20 mm with pulp followed by entangling them through treatment with high-pressure water jets. Since the constituent fibers are entangled in it, the non-woven fabric disclosed has a bulky feel. However, in producing the non-woven fabric, long fibers are entangled through high-pressure water jet treatment, whereby the non-woven fabric produced could have such a relatively high wet strength. Therefore, according to the technique disclosed, it is difficult to realize well-balanced bulkiness, strength and water-degradability for the non-woven fabric produced, and the non-woven fabric produced is unsuitable to disposal in flush toilets, etc.

SUMMARY OF THE INVENTION

[0007] The present invention is to solve the problems in the prior art noted above, and its one object is to provide a water-decomposable fibrous sheet which is well decomposed in water and has high dry strength.

[0008] Another object of the invention is to provide a water-decomposable fibrous sheet which has high wet strength to such a degree that it is well usable in wet even though no binder is added thereto.

[0009] Still another object of the invention is to provide a water-decomposable fibrous sheet which is safe for its application to the skin.

[0010] Specifically, the invention is to provide a water-decomposable fibrous sheet, which comprises from 3 % by mass to 100 % by mass of fibrillated rayon comprising primary fibers and microfibers extending therefrom, and from 0 % by mass to 97 % by mass of other fibers having a length of at most 10 mm, and in which the fibrillated rayon has a degree of beating of at most 700 cc; the primary fibers have a length in a range of from 1.8 mm to 10 mm at a peak of mass distribution thereof; and at least the microfibers extending from the primary fibers of the fibrillated rayon are entangled with at least one of other primary fibers, other microfibers extending from the other primary fibers and the other fibers.

[0011] The invention is also to provide a water-decomposable fibrous sheet, which comprises from 3 % by mass to

100 % by mass of fibrillated rayon comprising primary fibers and microfibers extending therefrom, and from 0 % by mass to 97 % by mass of other fibers having a length of at most 10 mm, and in which the primary fibers have a length in a range of from 1.8 mm to 10 mm at a peak of mass distribution thereof; the microfibers having a length of at most 1 mm account for from 0.1 to 65 % by mass of the self-weight of the fibrillated rayon; and at least the microfibers extending from the primary fibers of the fibrillated rayon are entangled with at least one of other primary fibers, other microfibers extending from the other primary fibers and the other fibers.

[0012] The water-decomposable fibrous sheets described above are preferably non-woven fabrics subjected to water jetting treatment.

[0013] Also, the invention is to provide a water-decomposable fibrous sheet, which comprises from 3 % by mass to 100 % by mass of fibrillated rayon comprising primary fibers and microfibers extending therefrom, and from 0 % by mass to 97 % by mass of other fibers having a length of at most 10 mm, and in which the fibrillated rayon has a degree of beating of at most 700 cc; the primary fibers have a length in a range of from 1.8 mm to 10 mm at a peak of mass distribution thereof; and at least the microfibers extending from the primary fibers of the fibrillated rayon are hydrogen bonded with at least one of other primary fibers, other microfibers extending from the other primary fibers and the other fibers.

[0014] The invention is also to provide a water-decomposable fibrous sheet, which comprises from 3 % by mass to 100 % by mass of fibrillated rayon comprising primary fibers and microfibers extending therefrom, and from 0 % by mass to 97 % by mass of other fibers having a length of at most 10 mm, and in which the primary fibers have a length in a range of from 1.8 mm to 10 mm at a peak of mass distribution thereof; the microfibers having a length of at most 1 mm account for from 0.1 to 65 % by mass of the self-weight of the fibrillated rayon; and at least the microfibers extending from the primary fibers of the fibrillated rayon are hydrogen bonded with at least one of other primary fibers, other microfibers extending from the other primary fibers and the other fibers.

[0015] The water-decomposable fibrous sheets described above are preferably produced in a paper-making process. In this case, preferably, the fibrillated rayon has a degree of beating of at most 400 cc.

[0016] Naturally in dry and even in wet with water, the water-decomposable fibrous sheet of the invention all the time keeps high strength while it is used as a wiper. In addition, when it is immersed in a large amount of water after used, it is readily decomposed. Therefore, after used, it can be disposed of in toilets, etc. What is more, the water-decomposable fibrous sheet of the invention is composed of materials not harmful to human bodies.

[0017] More specifically, in the water-decomposable fibrous sheet of the invention, because the microfibers of the fibrillated rayon act to bind the fibers together, well balanced decomposability in water and strength are realized. With the microfibers entangled with or hydrogen bonded with other fibers, the fibrous sheet procures high strength. On the other hand, when kept in contact with a large amount of water, the microfibers are separated from the other fibers, and therefore, the fibrous sheet is readily decomposed in water. In particular, when the microfibers extending from the primary fibers of the fibrillated rayon are entangled with at least one of other primary fibers, other microfibers extending from the other primary fibers and the other fibers through the water jetting treatment, the fibers are strongly bound together, and moreover, the dry strength of the sheet is increased owing to the hydrogen bonding power of the microfibers. Such hydrogen bonding may sometimes be canceled in a wet condition, but the sheet can maintain high strength even in wet because of the entanglement of the microfibers.

[0018] On the other hand, when the water-decomposable fibrous sheet of the invention is produced for example in a paper-making process i.e., produced without subjecting it to water jetting treatment, the fibrous sheet has high strength owing to the presence of the microfibers. The microfibers can exhibit the hydrogen bonding power as much as, or more than pulp, and therefore, the fibrous sheet has well balanced decomposability in water and strength. The fibrous sheet thus produced in a paper-making process will be excellent in strength upon use in a dry condition. Even in such sheet, additionally, the wet strength could be increased owing to the entanglement of the microfibers.

[0019] In the invention, where the primary fibers have a length of from 2.5 mm to less than 4.5 mm at a peak of mass distribution thereof and the fibrillated rayon has a degree of beating of smaller than 400 cc, it is desirable that the microfibers having a length of at most 1 mm account for from 0.5 to 15 % by mass of the self-weight of the fibrillated rayon.

[0020] Where the primary fibers have a length of from 2.5 mm to less than 4.5 mm at a peak of mass distribution thereof and the fibrillated rayon has a degree of beating of from 400 cc to 700 cc, it is desirable that the microfibers having a length of at most 1 mm account for from 0.1 to 5 % by mass of the self-weight of the fibrillated rayon.

[0021] Where the primary fibers have a length of from 4.5 mm to 7.5 mm at a peak of mass distribution thereof and the fibrillated rayon has a degree of beating of smaller than 400 cc, it is desirable that the microfibers having a length of at most 1 mm account for from 8 to 65 % by mass of the self-weight of the fibrillated rayon.

[0022] Where the primary fibers have a length of from 4.5 mm to 7.5 mm at a peak of mass distribution thereof and the fibrillated rayon has a degree of beating of from 400 cc to 700 cc, it is desirable that the microfibers having a length of at most 1 mm account for from 0.3 to 50 % by mass of the self-weight of the fibrillated rayon.

[0023] Where the primary fibers have a length of 3 ± 0.5 mm at a peak of mass distribution thereof, it is desirable

that the microfibrils having a length of at most 1 mm account for from 0.1 to 10 % by mass of the self-weight of the fibrillated rayon.

[0024] Where the primary fibers have a length of 4 ± 0.5 mm at a peak of mass distribution thereof, it is desirable that the microfibrils having a length of at most 1 mm account for from 1 to 14 % by mass of the self-weight of the fibrillated rayon.

[0025] Where the primary fibers have a length of 5 ± 0.5 mm at a peak of mass distribution thereof, it is desirable that the microfibrils having a length of at most 1 mm account for from 0.3 to 45 % by mass of the self-weight of the fibrillated rayon.

[0026] Where the primary fibers have a length of 6 ± 0.5 mm at a peak of mass distribution thereof, it is desirable that the microfibrils having a length of at most 1 mm account for from 5 to 50 % by mass of the self-weight of the fibrillated rayon.

[0027] Where the primary fibers have a length of 7 ± 0.5 mm at a peak of mass distribution thereof, it is desirable that the microfibrils having a length of at most 1 mm account for from 10 to 65 % by mass of the self-weight of the fibrillated rayon.

[0028] In the process of forming fibrillated rayon by beating rayon, the length of primary fibers of the fibrillated rayon may sometimes varies to be shorter or longer due to the beating process. In addition, the non-fibrillated rayon (rayon before beating) per se has a deviation in length. Therefore, in the above, such variation and deviation in fiber length has been taken into consideration. Where the length of the rayon before beating is 3 mm, 4 mm, 5 mm, 6 mm or 7 mm, for example, the length of the primary fibers at a peak of mass distribution thereof falls in the range of 3 ± 0.5 mm, 4 ± 0.5 mm, 5 ± 0.5 mm, 6 ± 0.5 mm or 7 ± 0.5 mm.

[0029] Where the ratio of the weight of the microfibrils having a length of at most 1 mm to the self-weight of the fibrillated rayon is defined as described above, the fineness of the fibrillated rayon is preferably from 1.2 to 1.9 dtex.

[0030] Preferably, the fibers having a length of at most 10 mm are biodegradable fibers. It is desirable that the biodegradable fibers are those of at least one selected from the group consisting of regenerated cellulose, pulp, aliphatic polyesters, polyvinyl alcohol and collagen.

[0031] Preferably, the basis weight of the water-decomposable fibrous sheet of the invention falls between 20 and 100 g/m².

[0032] Preferably, the degree of decomposition in water of the fibrous sheet is at most 200 seconds, as measured according to JIS P-4501.

[0033] Preferably, the wet strength of the fibrous sheet is at least 110 g/25 mm.

[0034] Preferably, the dry strength of the fibrous sheet is at least 350 g/25 mm.

[0035] The invention also provides a water-decomposable fibrous sheet, which comprises from 3 to 100 % by mass (preferably, 5 to 100 % by mass) of fibrillated rayon of such that the primary fibers constituting it have a length of from 1.8 to 10 mm, and from 0 to 97 % by mass (preferably, 0 to 95 % by mass) of other fibers having a length of at most 10 mm, and which has a basis weight of from 20 to 100 g/m², a thickness of at least 0.2 mm, a degree of decomposition in water in a previously wetted condition as measured according to JIS P-4501 of at most 200 seconds, and a wet strength of at least 110 g/25 mm.

[0036] Preferably, the water-decomposable fibrous sheet of the invention is a non-woven fabric having been subjected to water-jetting treatment. It is bulky and has a soft feel.

[0037] Preferably, the fibrillated rayon constituting the fibrous sheet has a degree of beating of at most 400 cc, and the fibrous sheet is produced in a paper-making process.

BRIEF DESCRIPTION OF THE DRAWINGS

[0038]

Fig. 1 is a magnified microscopic picture of one example of the water-decomposable fibrous sheet of the invention.

Fig. 2 is a graphical view of the picture of Fig. 1.

Fig. 3 is a graph showing the mass distribution profile of the fiber length of non-beaten rayon.

Fig. 4 is a graph showing the mass distribution profile of the fiber length of beaten rayon, for which rayon having a fiber length of 5 mm was beaten.

Fig. 5 is a graph showing the mass distribution profile of the fiber length of rayon having been free-beaten.

Fig. 6 is a graph showing the mass distribution profile of the fiber length of beaten rayon, for which rayon having a fiber length of 3 mm was beaten in wet.

Fig. 7 is a graph showing the mass distribution profile of the fiber length of beaten rayon, for which rayon having a fiber length of 4 mm was beaten in wet.

Fig. 8 is a graph showing the mass distribution profile of the fiber length of beaten rayon, for which rayon having a fiber length of 6 mm was beaten in wet.

Fig. 9 is a graph showing the mass distribution profile of the fiber length of beaten rayon, for which rayon having a fiber length of 7 mm was beaten in wet.

Fig. 10 is a graph showing the mass distribution profile of the fiber length of beaten rayon, for which rayon having a fiber length of 5 mm was beaten in wet.

Fig. 11 is a graph showing the relationship between the wet strength of the sheets prepared in Example H and the degree of decomposition thereof in water, relative to varying degrees of beating rayon to give fibrillated rayon for the sheets.

DESCRIPTION OF PREFERRED EMBODIMENTS OF THE INVENTION

[0039] The fibrillated rayon for use in the invention is meant to indicate fibers of regenerated cellulose rayon having finely-fibrillated surfaces, or that is, those with microfibrils which are submicron-sized in thickness, having peeled and extending from the surfaces of the primary fibers (of the fibrillated rayon).

[0040] Fig. 1 and Fig. 2 are a magnified microscopic picture of one example of the water-decomposable fibrous sheet of the invention that comprises fibrillated rayon 1, rayon 4 and pulp 3, and its graphic view, respectively. The sheet of Fig. 1 and Fig. 2 was prepared from a fibrous web that comprises those fibrillated rayon 1, rayon 4 and pulp 3, by subjecting it to water-jetting treatment. As in Fig. 1 and Fig. 2, it is seen that microfibrils 2 extend from the surface of the primary fiber of the fibrillated rayon 1. The surface of ordinary regenerated cellulose (rayon 4) is smooth, while that of the fibrillated rayon 1 is fibrillated to have microfibrils 2 therearound, as illustrated; and the two, rayon 4 and fibrillated rayon 1 have different structures.

[0041] The fibrillated fibers of that type can be produced, for example, by mechanically processing rayon while it has absorbed water and is still wetted. Concretely, they may be produced, for example, according to a method of strongly stirring rayon in water in a mixer, or a method of beating rayon in a pulper, a refiner, a beater or the like (this is a wet-beating method). More precisely, the fibrillated rayon includes fibers as produced by processing wet-spun rayon such as polynosic or the like with an acid followed by mechanically fibrillating it, fibers as produced by mechanically fibrillating solvent-spun rayon, etc. Apart from those, the fibrillated rayon can also be produced from ordinary, wet-spun regenerated cellulose.

[0042] Only the fibrillated rayon, or a combination of the fibrillated rayon and other fibers having a fiber length of at most 10 mm is formed into a fibrous web, and the resulting fibrous web is preferably subjected to water-jetting treatment or the like to be formed into the water-decomposable fibrous sheet of the invention. In this process, the microfibrils around the surface of the fibrillated rayon are entangled with the other fibers or the other microfibrils. Therefore, the specifically-entangled structure of the fibrous sheet of the invention differs from the structure of ordinary spun-lace non-woven fabric where the constituent fibers are entangled together. From Fig. 1 and Fig. 2, it is seen that the microfibrils 2 around the fibrillated rayon 1 are entangled with the other fibers (rayon 4 and fibrillated rayon 1), and the pulp 3 exists among those fibers.

[0043] The primary fibers constituting the fibrillated rayon have a length falling between 1.8 mm and 10 mm (at a peak of mass distribution of the primary fibers). The length of the primary fibers as referred to herein is meant to indicate the length of the primary fibers except the microfibrils therearound, but not the length of the microfibrils. If the length of the primary fibers at a peak of mass distribution thereof is longer than the defined range, not only the microfibrils but also the primary fibers will be entangled together, or the primary fibers will be entangled with the other fibers (rayon 4 and pulp 3), at the time of water jetting treatment. In that condition, the water-decomposability of the non-woven fabric will be poor. On the other hand, if the length of the primary fibers is shorter than the defined range, the microfibrils could not be entangled to the desired degree. If so, the wet strength of the non-woven fabric will be low. Preferably, the length of the rayon before beating falls between 3 mm and 6 mm. In other words, the length of the primary fibers of the fibrillated rayon at a peak of mass distribution thereof preferably falls between 2.5 mm and 6.5 mm.

[0044] Where fibrillated rayon of which the primary fibers have a length of at least 7 mm is used and where the fibrous web is subjected to water-jetting treatment, the primary fibers of the fibrillated rayon will be entangled too much and the decomposability in water of the sheet comprising them will be low. In order to evade the reduction in the decomposability in water of the sheet of that case, it is desirable that the basis weight of the non-woven fabric is controlled to be at most 30 g/m². In that case, it is also desirable to reduce the proportion of the fibrillated rayon of which the primary fibers have a length of 7 mm or longer, to at most 10 % by mass.

[0045] To specifically define the fibrillated rayon capable of being preferably used in the invention, some methods may be employed. One is to analyze the mass distribution of the primary fibers and the microfibrils constituting the fibrillated rayon. The microfibrils are shorter than the primary fibers. Therefore, analyzing the distribution of the fiber length in the fibrillated rayon clarifies the mass distribution of the primary fibers and the microfibrils constituting the fibrillated rayon. Another method of specifically defining the intended fibrillated rayon is based on the degree of beating the fibrillated rayon (CSF; Canadian Standard Freeness).

[0046] The mass distribution profile of the fiber length of non-beaten, non-fibrillated rayon (CSF = 740 cc, fiber

length 5 mm, 1.7 dtex), for which $n = 3$, is shown in Fig. 3. As in Fig. 3, the mass distribution in non-beaten rayon is almost concentrated in the fiber length range of 5 mm \pm 1 mm or so. The non-beaten rayon of Fig. 3 was beaten in wet to different degrees, and the mass distribution of the beaten, fibrillated rayon was analyzed relative to the different fiber lengths. The resulting data are plotted to give the graph of Fig. 4. Rayon samples having a concentration of 0.75 % by mass were prepared and beaten in a mixer. As in Fig. 4, the mass distribution gave two peaks. From this, the fibrillated rayon for use in the invention can be identified as one having the fiber length peak for the primary fibers of the fibrillated rayon itself and the fiber length peak for the fibrillated microfibers.

[0047] The fibrillated rayon for use herein is prepared by beating rayon in wet, as in the above. If, being different from this, rayon is beaten in an ordinary free-beating manner to promote its beating (so that the beaten rayon shall have a reduced numerical value indicating its degree of beating), it will be entirely pulverized into small particles, as in Fig. 5. In that condition, most of the rayon would lose the original fiber length. The free-beaten rayon is not within the scope of the fibrillated rayon for use in the invention.

[0048] Regarding the ratio of the microfibers to the fibrillated rayon preferred for use in the invention, it is desirable that the microfibers extending from the primary fibers of the fibrillated rayon and having a length of at most 1 mm account for from 0.1 to 65 % by mass of the self-weight of the fibrillated rayon. The fibrillated rayon having the morphology of that type may be obtained by beating rayon to a degree of at most 700 cc. With the fibrillated rayon, the fibrous sheet could well decompose in water and could have a preferred degree of strength. In the fibrillated rayon of that type, the remaining part that accounts for approximately from 35 to 99.9 % by mass essentially comprises the primary fibers of the fibrillated rayon, but including long microfibers having been prolonged through promoted fibrillation and also chopped rayon. As the case may be, the length of the primary fibers of the beaten, fibrillated rayon will be somewhat smaller than the original length of those of the non-beaten rayon, or will be somewhat prolonged in appearance owing to the microfibers extending from the end parts of the primary fibers. Therefore, the length of the primary fibers at a peak of mass distribution thereof will be the original length of the non-beaten rayon (rayon before beating) \pm 0.5 mm.

[0049] The mass distribution of the fibrillated rayon relative to the fiber length depends on both the original fiber length of the non-beaten rayon and the degree of beating of the fibrillated rayon. In reference to this, rayon having a different fiber length of 3 mm, 4 mm, 6 mm or 7 mm was beaten in wet, and the mass distribution of the beaten rayon relative to the varying fiber length was analyzed. The data were plotted to give the graphs of Fig. 6 to Fig. 9. Of the beaten rayon samples whose data are plotted as in the graphs of Fig. 4 and Figs. 6 to 9, the mass distribution of the microfibers having a length of at most 1 mm and the mass distribution of the primary fibers whose length is near to the original fiber length of the non-beaten rayon (but having varied within a range of from -0.6 mm to +0.4 mm) are given in Table 1-1 below.

[0050] As seen from the graphs of Figs. 6 to 9, in the fibrillated rayon after beating, the length of the primary fibers at a peak of mass distribution of the primary fibers varies \pm 0.5 mm, \pm 0.3 mm, or -0.3 to +0.1 mm, from the original length of the rayon before beating.

Table 1-1

3 mm	Degree of Beating (cc)	not longer than 1.0 mm (% by mass)	2.4 to 3.4 mm (% by mass)
	745	3.38	60.33
	464	2.61	72.84
	337	4.40	67.89
	203	4.49	65.35
	96	6.31	58.86
4 mm	Degree of Beating (cc)	not longer than 1.0 mm (% by mass)	3.4 to 4.4 mm (% by mass)
	745	3.78	45.66
	615	1.85	55.19
	445	3.70	58.02
	353	7.02	59.58
	227	11.47	47.23
	147	13.28	41.51

Table 1-1 (continued)

5	5 mm	Degree of Beating (cc)	not longer than 1.0 mm (% by mass)	4.4 to 5.4 mm (% by mass)
		740	0.69	76.56
		600	4.06	63.80
		400	22.49	47.25
		200	35.95	32.77
		100	41.76	22.72
15	6 mm	Degree of Beating (cc)	not longer than 1.0 mm (% by mass)	5.4 to 6.4 mm (% by mass)
		740	4.19	28.64
		500	18.45	47.78
		410	22.90	46.98
		204	47.74	21.85
		102	45.81	18.12
25	7 mm	Degree of Beating (cc)	not longer than 1.0 mm (% by mass)	6.4 to 7.2 mm (% by mass)
		732	2.83	34.29
		607	28.98	43.07
		469	49.06	24.96
		348	63.29	10.72
		164	61.53	6.19
30		95	55.58	4.39

35 [0051] Next, in Table 1-2, the proportion of the microfibers having a length of at most 1.0 mm is given, when rayon having an original fiber length of 5 mm and having a fineness of 1.7 dtex was beaten while varying the degree of beating step by step in the range of from 740 cc to 67 cc. In Table 1-3, the proportion of the microfibers having a length of at most 1.0 mm is given, when rayon having an original fiber length of 3 mm and having a fineness of 1.4 dtex was beaten while varying the degree of beating step by step in the range of from 644 cc to 211 cc, and when rayon having an original fiber length of 3 mm and having a fineness of 1.7 dtex was beaten while varying the degree of beating step by step in the range of from 653 cc to 163 cc. In Table 1-4, the proportion of the microfibers having a length of at most 1.0 mm is given, when rayon having an original fiber length of 5 mm and having a fineness of 1.4 dtex was beaten while varying the degree of beating step by step in the range of from 676 cc to 135 cc, and when rayon having an original fiber length of 5 mm and having a fineness of 1.7 dtex was beaten while varying the degree of beating step by step in the range of from 695 cc to 186 cc.

Table 1-2

50	5mm 1.7 dtex	Degree of Beating (cc)	1.0mm or less (% BY MASS)
		740	0.69
		520	12.77
		377	23.20
		185	39.37
		67	35.47

Table 1-3

5	3mm 1.4dtex	Degree of Beating (cc)	1.0mm or less (% BY MASS)	3mm 1.7dtex	Degree of Beating (cc)	1.0mm or less (% BY MASS)
		644	0.57		653	0.16
		626	0.46		584	0.23
10		595	0.40		472	0.43
		563	0.78		372	0.59
		480	0.71		333	0.63
15		407	0.69		291	1.13
		352	0.87		259	1.25
		340	1.05		212	1.54
		297	1.32		176	1.92
20		241	1.39		163	3.61
		211	1.77			

Table 1-4

30	5mm 1.4dtex	Degree of Beating (cc)	1.0mm or less (% BY MASS)	5mm 1.7dtex	Degree of Beating (cc)	1.0mm or less (% BY MASS)
		676	1.08		695	0.47
		646	1.06		625	1.49
35		631	2.08		521	7.17
		554	8.48		229	20.96
		433	7.39		200	17.14
		339	11.18		198	20.04
40		242	21.57		198	18.10
		183	20.43		198	17.59
		161	26.55		195	16.92
45		135	24.32		195	15.08
					190	15.14
					188	19.54
					187	17.41
50					186	13.94

[0052] In Table 1-1, the data in the thick-lined boxes are of the fibrillated rayon most preferred for use in the invention. Also, the data in Tables 1-2, 1-3 and 1-4, exclusive of the data of one having a degree of beating of 740 cc in Table 1-2, are of the fibrillated rayon most preferred for use in the invention. Here, the data in Tables 1-1 and 1-2 were obtained by beating rayon with a mixer, while the data in Tables 1-3 and 1-4 were obtained by beating rayon with a pulper or refiner used for mass-production. As in above Tables, it is understood that the percentage (by mass) of the microfibers having a length of at most 1 mm of the fibrillated rayon prepared by using a pulper or refiner becomes less

than that prepared by using a mixer. However, the water-decomposable fibrous sheet of the invention may be produced by using any one of the above means (mixer, pulper and refiner) to obtain well balanced water-decomposability and wet strength.

[0053] In the preferred ranges where the length of the rayon before beating is from 3 mm to less than 5 mm (i.e., where the length of the primary fibers of the fibrillated rayon at a peak of mass distribution thereof is from 2.5 mm to less than 4.5 mm) and where the degree of beating is smaller than 400 cc, the microfibers having a length of at most 1 mm account for from 0.5 to 15 % by mass of the self-weight (total mass) of the fibrillated rayon. However, if a pulper or refiner is used for beating rayon, the upper limit of 15 % by mass varies to about 8 % by mass. In those where the length of the rayon before beating is from 3 mm to less than 5 mm (i.e., where the length of the primary fibers of the fibrillated rayon at a peak of mass distribution thereof is from 2.5 mm to less than 4.5 mm) and where the degree of beating is from 400 cc to 700 cc, the microfibers having a length of at most 1 mm account for from 0.1 to 5 % by mass of the self-weight of the fibrillated rayon. However, if a pulper or refiner is used for beating rayon, the upper limit of 5 % by mass varies to about 3 % by mass. If the degree of beating is from 400 cc to 600 cc, the lower limit of 0.1 % by mass varies to 0.2 % by mass.

[0054] Still in those where the length of the rayon before beating is from 5 mm to 7 mm (i.e., where the length of the primary fibers of the fibrillated rayon at a peak of mass distribution thereof is from 4.5 mm to 7.5 mm) and where the degree of beating is smaller than 400 cc, the microfibers having a length of at most 1 mm account for from 8 to 65 % by mass of the self-weight of the fibrillated rayon. However, if a pulper or refiner is used for beating rayon, the upper limit of 65 % by mass varies to about 30 % by mass, and the lower limit of 8 % by mass varies to 5 % by mass. Further in those where the length of the rayon before beating is from 5 mm to 7 mm (i.e., where the length of the primary fibers of the fibrillated rayon at a peak of mass distribution thereof is from 4.5 mm to 7.5 mm) and where the degree of beating is from 400 cc to 700 cc, the microfibers having a length of at most 1 mm account for from 0.3 to 50 % by mass of the self-weight of the fibrillated rayon. However, if a pulper or refiner is used for beating rayon, the upper limit of 50 % by mass varies to about 20 % by mass. If the degree of beating is from 400 cc to 600 cc, the lower limit of 0.3 % by mass varies to 2 % by mass.

[0055] Moreover, in the preferred ranges where the rayon before beating has a length of 3 mm (i.e., where the primary fibers of the fibrillated rayon have a length of 3 ± 0.5 mm at a peak of mass distribution thereof), the microfibers having a length of at most 1 mm account for from 0.1 to 10 % by mass of the self-weight of the fibrillated rayon. However, if a pulper or refiner is used for beating rayon, the upper limit of 10 % by mass varies to about 5 % by mass. If the degree of beating is less than 600 cc, the lower limit of 0.1 % by mass varies to 0.2 % by mass.

[0056] In those where the rayon before beating has a length of 4 mm (i.e., where the primary fibers of the fibrillated rayon have a length of 4 ± 0.5 mm at a peak of mass distribution thereof), the microfibers having a length of at most 1 mm account for from 1 to 14 % by mass of the self-weight of the fibrillated rayon. However, if a pulper or refiner is used for beating rayon, the range varies to about 0.3 to 10 % by mass. If a pulper or refiner is used for beating rayon and the degree of beating is less than 600 cc, the lower limit varies to 0.5 % by mass.

[0057] In those where the rayon before beating has a length of 5 mm (i.e., where the primary fibers of the fibrillated rayon have a length of 5 ± 0.5 mm at a peak of mass distribution thereof), the microfibers having a length of at most 1 mm account for from 0.3 to 45 % by mass of the self-weight of the fibrillated rayon. However, if a pulper or refiner is used for beating rayon, the upper limit of 45 % by mass varies to about 30 % by mass. If a pulper or refiner is used for beating rayon and the degree of beating is less than 600 cc, the lower limit varies to 5 % by mass.

[0058] In those where the rayon before beating has a length of 6 mm (i.e., where the primary fibers of the fibrillated rayon have a length of 6 ± 0.5 mm at a peak of mass distribution thereof), the microfibers having a length of at most 1 mm account for from 5 to 50 % by mass of the self-weight of the fibrillated rayon. However, if a pulper or refiner is used for beating rayon, the range varies to about 0.5 to 30 % by mass. If a pulper or refiner is used for beating rayon and the degree of beating is less than 600 cc, the lower limit varies to 5 % by mass.

[0059] In those where the rayon before beating has a length of 7 mm (i.e., where the primary fibers of the fibrillated rayon have a length of 7 ± 0.5 mm at a peak of mass distribution thereof), the microfibers having a length of at most 1 mm account for from 10 to 65 % by mass of the self-weight of the fibrillated rayon. However, if a pulper or refiner is used for beating rayon, the range varies to about 3 to 50 % by mass. If a pulper or refiner is used for beating rayon and the degree of beating is less than 600 cc, the lower limit varies to 8 % by mass.

[0060] Where the ratio of the weight of the microfibers having a length of at most 1 mm to the self-weight of the fibrillated rayon is defined as described above, the fineness of the fibrillated rayon is preferably from 1.2 to 1.9 dtex.

[0061] The degree of beating of the fibrillated rayon preferred for use in the invention is described. Where beating rayon is promoted (to give a beaten, fibrillated rayon that shall have a lowered numerical value indicating its degree of beating), the ratio of the mass distribution of short fibers (including microfibers) will increase. In the invention, the fibrillated rayon preferably has a degree of beating of at most 700 cc. Fibrillated rayon having a degree of beating of larger than 700 cc could not have a strength necessary for the water-decomposable fibrous sheet of the invention. More preferably, the fibrillated rayon for use herein has a degree of beating of at most 600 cc. The increase in the strength of the

fibrous sheet will be more noticeable owing to the microfibers of the fibrillated rayon of that preferred type. Most preferably, the fibrillated rayon has a degree of beating of at most 400 cc. Even when fibrillated rayon having a degree of beating of at most 200 cc, or even at most 100 cc (for example, 50 cc or 0 cc) is used in producing it, the water-decomposable fibrous sheet could have well-balanced wet strength and decomposability in water.

5 [0062] However, if fibrillated rayon having been too much beaten (thereby having a too much reduced numerical value indicating its degree of beating), for example that having a degree of being of 0 cc is used, the degree of water filtration through the sheet in its production will be low. Therefore, it is desirable that the fibrous sheet comprises a combination of the fibrillated rayon of that type and other fibers. In this case, the proportion of the fibrillated rayon is preferably at most 30 %, more preferably at most 20 %. Also preferably, the fiber length of the fibrillated rayon (before beating)

10 is at most 6 mm, more preferably at most 5 mm.

[0063] The degree of beating of the fibrillated rayon can be controlled by varying the beating time and by selecting the beating means. For example, when rayon is beaten in a mixer, the time for processing it therein may be suitably determined. To obtain the fibrillated rayon, for example, a liquid containing rayon is processed in a mixer. For this, for example, the liquid may have a rayon concentration of 0.75 %, and it will be processed in an ordinary, commercially-

15 available 100V mixer. In this case, the degree of beating of the fibrillated rayon will be correlated with the beating time in the mixer, in the manner mentioned below. The following data may have an error of ± 30 seconds for the beating time. Where the rayon concentration is varied, the beating time in the mixer to attain the intended degree of beating shall vary.

Beating time, 2 minutes; degree of beating = 700 cc
 20 Beating time, 3 minutes; degree of beating = 600 cc
 Beating time, 4 minutes; degree of beating = 500 cc
 Beating time, 5 minutes; degree of beating = 300 cc
 Beating time, 7 to 8 minutes; degree of beating = 200 cc
 Beating time, 8 to 10 minutes; degree of beating = 50 cc

25 [0064] Where rayon (degree of beating, 740 cc; fiber length, 5 mm; 1.7 dtex) is beaten in a pulper in place of the mixer as in the above, the data will be as follows:

Beating time, 120 minutes; degree of beating = 629 cc
 30 Beating time, 330 minutes; degree of beating = 237 cc

[0065] The mass distribution of the fiber length of the beaten rayon is as in Fig. 10.

[0066] The fineness of the fibrillated rayon in terms of denier is preferably from 1 to 7 d (denier), that is, from 1.1 to 7.7 dtex or so. If its fineness is smaller than the defined range, the primary fibers of the fibrillated rayon will be too much entangled, and the decomposability in water of the fibrous sheet comprising it will be low. If, on the other hand, its fineness is larger than the defined range, the formation of the fibrous sheet will be not good and, in addition, the productivity thereof will be low.

[0067] The fiber length of the fibrillated rayon, the mass distribution thereof relative to the fiber length, the degree of beating thereof, and the fineness thereof will be suitably controlled, depending on their data, the proportion of the fibrillated rayon, and the type of the other fibers to be blended with the fibrillated rayon.

40 [0068] The water-decomposable fibrous sheet of the invention may be made of only the fibrillated rayon, but may contain any other fibers having a length of at most 10 mm in addition to the fibrillated rayon. In the water-decomposable fibrous sheet comprising the fibrillated rayon and such other fibers, the microfibers of the fibrillated rayon will be well entangled with the other fibers to ensure high strength of the sheet. The microfibers entangled with the other fibers in the sheet will be released from them when a large amount of water is given to the sheet, and therefore the sheet easily decomposes in water.

[0069] As the other fibers having a length of at most 10 mm, preferred are those well dispersible in water, that is, water-dispersible fibers. The dispersibility in water referred to herein has the same meaning as the decomposability in water, and is meant to indicate that the fibers are dispersed well in water when kept in contact with a large amount of water. More preferably, those other fibers are biodegradable fibers. The biodegradable fibers naturally decompose by themselves when disposed of in the natural world. The length of the other fibers for use herein is meant to indicate the mean length thereof. The lower limit of the length (or mean length) of the other fibers is preferably 1 mm or more.

55 [0070] The other fibers for use in the invention may be those of at least one sort selected from the group consisting of natural fibers and chemical fibers. The natural fibers include those from wood pulp such as soft wood pulp, hard wood pulp, etc.; and also those from Manila hemp, linter pulp, etc. These natural fibers are biodegradable. Of those, preferred are bleached soft-wood kraft pulp, and bleached hard-wood kraft pulp, as having high dispersibility in water. Also usable herein are chemical fibers such as regenerated fibers of rayon, etc.; synthetic fibers of polypropylene, polyvinyl alcohol, polyester, polyacrylonitrile, etc.; biodegradable synthetic fibers; synthetic pulp of polyethylene, etc. Of those, preferred

is rayon, as being biodegradable. Further usable are still other biodegradable fibers of polylactic acid, polycaprolactone, aliphatic polyesters such as polybutylene succinate, polyvinyl alcohol, collagen, etc. Needless-to-say, any fibers other than those mentioned above are usable herein so far as they are dispersible in water.

5 [0071] For the soft wood pulp, its degree of beating preferably falls between 500 and 700 cc or so. If its degree of beating is smaller than the defined range, the non-woven fabric comprising the pulp will have a paper-like morphology, and will have a rough feel. If, however, its degree of beating is larger than the defined range, the sheet comprising the pulp could not have the necessary strength.

10 [0072] The water-decomposable fibrous sheet of the invention may be formed of only the fibrillated rayon or a combination of the fibrillated rayon and other fibers having a length of at most 10 mm. Here, the ratio of the components is preferably such that the proportion of the fibrillated rayon is from 3 to 100 % by mass and that of the other fibers is from 0 to 97 % by mass, more preferably such that the proportion of the fibrillated rayon is from 5 to 100 % by mass and that of the other fibers is from 0 to 95 % by mass, still more preferably such that the proportion of the fibrillated rayon is from 5 to 70 % by mass and that of the other fibers is from 30 to 95 % by mass, most preferably such that the proportion of the fibrillated rayon is from 10 to 50 % by mass and that of the other fibers is from 50 to 90 % by mass.

15 [0073] Also preferably, the basis weight (this may be referred to as "Metsuke") of the fibrous sheet of the invention falls between 20 and 100 g/m², in order that the sheet can bear wiping in wet. If its basis weight is smaller than the defined range, the sheet could not have the necessary wet strength. If, however, its basis weight is larger than the defined range, the sheet will be not flexible. In particular, for application to the skin of human bodies, the basis weight of the sheet is more preferably from 30 to 70 g/m², in view of the wet strength and the soft feel of the sheet.

20 [0074] The water-decomposable fibrous sheet may be used directly after it has been produced in a wet paper-making process or the like. The water-decomposable fibrous sheet could ensure its strength owing to the entangled microfibers therein, and, in addition, its dry strength could be increased owing to the hydrogen bonding at the OH groups existing on the surfaces of the fibrillated rayon therein. As the degree of beating increases, that is, as the number of the microfibers increases, the surface area of the fibers increases, to thereby enhance the strength of the hydrogen bonding between fibers.

25 [0075] For more surely increasing its wet strength, the fibrous sheet is preferably in the form of a non-woven fabric that may be produced by forming a fibrous web of fibrillated rayon alone or of fibrillated rayon combined with other fibers, for example, in a wet process, followed by subjecting the fibrous web to water-jetting treatment. The fibrous web referred to herein is meant to indicate a sheet as prepared by sheeting a fibrous block in such a manner that the fibers constituting it are oriented in some degree in a predetermined direction. The fibrous web may also be prepared in a dry process, and may be subjected to water-jetting treatment. For the water-jetting treatment, employed is an ordinary high-pressure water-jetting device. Through the water-jetting treatment, the fibrous web is formed into a non-woven fabric that is bulky as a whole and has a soft feel like cloth. In addition, the non-woven fabric has a strong wet strength enough for its use, and when kept in contact with a large amount of water after disposed of in toilets and others, it well decomposes in water as the microfibers entangled therein and even the fibers loosely entangled therein come untied while in water.

30 [0076] The details of the water-jetting treatment are described. The fibrous web is put on a continuously moving conveyor belt, and exposed to high-pressure water-jetting streams to such a degree that the streams applied thereto could pass through its back surface. Through the water-jetting treatment, the properties of the non-woven fabric are changed, depending on the basis weight of the fibrous web processed, the pore diameter of the jetting nozzle used, the number of pores of the jetting nozzles, the feeding speed at which the fibrous web is processed with the water-jetting streams (processing speed), etc. For example, when the work done to be derived from the following formula:

$$45 \quad \text{Work done (kW/m}^2\text{)} = \{1.63 \times \text{jetting pressure (kgf/cm}^2\text{ or Pa)} \times \text{jetting flow rate (m}^3\text{/min)}\} \\ \text{/processing speed (m/min),}$$

50 is from 0.04 to 0.5 (kW/m²) in one treatment for one surface of the fibrous web, a favorable non-woven fabric can be produced by subjecting the fibrous web to the water-jetting treatment once or repeated 2 to 6 times. In this case, if the fibers are entangled too much by repeating the water-jetting treatment more, the decomposability in water of the resulting non-woven fabric will be lowered. Moreover, if the work done in one treatment is larger than the defined range, the fibrous web may be broken. If, on the other hand, the work done in one treatment is smaller than the defined range, the processed non-woven fabric could not be bulky to a desired degree. One or both surfaces of the fibrous web may undergo the water-jetting treatment. If the processing conditions are changed variously, favorable non-woven fabrics could be obtained even though the work done does not fall within the preferred range.

55 [0077] After having been formed, it is desirable that the fibrous web is directly subjected to the water-jetting treatment without being dried, for simplifying the process for the treatment. However, the fibrous web may be subjected to the water-jetting treatment after having been once dried.

[0078] Preferably, the strength at break in wet of the water-decomposable fibrous sheet of the invention that contains water is at least 110 g/25 mm in terms of the root of the product obtained by multiplying the strength in the machine direction (MD) by that in the cross direction (CD). The strength at break in wet (this is herein referred to as wet strength) is meant to indicate the tensile strength at break (gf) of the fibrous sheet in wet. To obtain its wet strength in terms of the tensile strength at break, a piece of the fibrous sheet having a width of 25 mm and a length of 150 mm is immersed in water to thereby infiltrate water of 2.5 times the mass of the sheet into the sheet piece, and the thus-wetted sheet piece is pulled until it is broken, by the use of a Tensilon tester, for which the chuck distance is 100 mm and the stress rate is 100 mm/min.

[0079] However, the data thus measured according to the method are merely the criterion for the strength of the fibrous sheet, and the fibrous sheet of the invention will be comfortably used for wiping purposes so far as it has a strength that is substantially the same as the wet strength thereof measured in the manner as above. More preferably, the wet strength of the fibrous sheet is at least 130 g/25 mm.

[0080] On the other hand, it is also desirable that the fibrous sheet has high strength enough for its use even in dry. Therefore, the dry strength of the fibrous sheet is preferably at least 350 g/25 mm in terms of the root of the product obtained by multiplying the strength at break in the machine direction (MD) by that in the cross direction (CD).

[0081] Also preferably, the water-decomposable fibrous sheet of the invention has a degree of decomposition in water of at most 300 seconds, more preferably at most 200 seconds, even more preferably at most 150 seconds, the most preferably at most 100 seconds. The degree of decomposition in water is measured according to the test method of JIS P-4501 that indicates the degree of easy degradation of toilet paper in water. The outline of the paper degradation test method is described. A piece of the water-decomposable fibrous sheet of the invention having a length of 10 cm and a width of 10 cm is put into a 300-ml beaker filled with 300 ml of ion-exchanged water, and stirred therein with a rotor. The revolution speed of the rotor is 600 rpm. The condition of the test piece being dispersed in water is macroscopically observed, and the time until the test piece is finely dispersed is measured.

[0082] However, the data thus measured according to the method are merely the criterion for the decomposability in water of the fibrous sheet, and the fibrous sheet of the invention will be disposed of in flush toilets and others with no problem so far as it has a degree of decomposition in water that is substantially the same as the data measured in the manner as above.

[0083] To make the water-decomposable fibrous sheet of the invention have a degree of decomposition in water and a wet strength falling within the preferred ranges noted above, the type of the fibers constituting the sheet, the proportion of the fibers, the basis weight of the sheet, and the conditions for the water-jetting treatment for the sheet may be varied. For example, where fibrillated rayon of which the primary fibers are long is used, or where fibrillated rayon not beaten so much (that is, having an increased numerical value indicating its degree of beating) is used, the basis weight of the non-woven fabric is reduced, or the proportion of the fibrillated rayon is reduced, or the processing energy for the water-jetting treatment is reduced, whereby the fibrous sheet obtained could have an increased degree of decomposition in water and an increased wet strength. On the other hand, where fibrillated rayon having been much beaten (that is, having a reduced numerical value indicating its degree of beating) is used, the proportion of the fibrillated rayon is increased or the basis weight of the non-woven fabric is increased to obtain the better results.

[0084] Even though not containing a binder, the water-decomposable fibrous sheet of the invention could have a high degree of decomposition in water and a high wet strength. However, in order to further increase the wet strength of the sheet, a water-soluble or water-swellaable binder capable of binding fibers together may be added to the sheet. The binder includes, for example, carboxymethyl cellulose; alkyl celluloses such as methyl cellulose, ethyl cellulose, benzyl cellulose, etc.; polyvinyl alcohol; modified polyvinyl alcohols having a predetermined amount of a sulfonic group or a carboxyl group, etc. The amount of the binder to be added to the sheet may be small. For example, only about 2 g of the binder, relative to 100 g of the fibers constituting the sheet, may be added to the sheet whereby the wet strength of the sheet could be much increased. As being soluble or swellable in water, the binder dissolves or swells in water when kept in contact with a large amount of water. To add the water-soluble binder to the non-woven fabric, employable is a coating method of applying the binder to the non-woven fabric through a silk screen. On the other hand, the water-swellaable binder may be added to the fibrous web for the sheet while the fibrous web is prepared in a paper-making process.

[0085] Where the binder is added to the fibrous sheet of the invention, an electrolyte such as a water-soluble inorganic or organic salt may be added thereto along with the binder, whereby the wet strength of the sheet could be increased much more. The inorganic salt includes, for example, sodium sulfate, potassium sulfate, zinc sulfate, zinc nitrate, potassium alum, sodium chloride, aluminium sulfate, magnesium sulfate, potassium chloride, sodium carbonate, sodium hydrogencarbonate, ammonium carbonate, etc.; and the organic salt includes, for example, sodium pyrrolidone-carboxylate, sodium citrate, potassium citrate, sodium tartrate, potassium tartrate, sodium lactate, sodium succinate, calcium pantothenate, calcium lactate, sodium laurylsulfate, etc. Where an alkyl cellulose is used as the binder, it is preferably combined with a monovalent salt. Where a modified or non-modified polyvinyl alcohol is used as the binder, it is preferably combined with a monovalent salt.

[0086] In addition, where an alkyl cellulose is used as the binder, any of the following compounds may be added to the water-decomposable fibrous sheet so as to further increase the strength of the sheet. The additional compounds include, for example, copolymers of a polymerizable acid anhydride monomer with other comonomers, such as (meth)acrylic acid-maleic acid resins, (meth)acrylic acid-fumaric acid resins, etc. Preferably, the copolymers are saponified with sodium hydroxide or the like into water-soluble copolymers partially having a sodium carboxylate moiety. Adding an amino acid derivative such as trimethylglycine or the like to the sheet is also desirable, as also enhancing the strength of the sheet.

[0087] To ensure the desired degree of decomposition in water and the desired wet strength as above, the water-decomposable fibrous sheet of the invention may have a multi-layered structure. For example, a first fibrous sheet layer containing fibrillated rayon but not subjected to water-jetting treatment may underlie a second fibrous sheet layer containing fibrillated rayon and having been subjected to water-jetting treatment to give one water-decomposable fibrous sheet. The sheet having the two-layered structure could be more bulky and could have an increased wet strength without lowering its decomposability in water. One first fibrous sheet layer may be sandwiched between two second fibrous sheet layers to give one water-decomposable fibrous sheet having a three-layered laminate structure.

[0088] The water-decomposable fibrous sheet of the invention may optionally contain any other substances, without interfering with the advantages of the invention. For example, it may contain any of surfactants, microbicides, preservatives, deodorants, moisturizers, alcohols such as ethanol, polyalcohols such as glycerin, etc.

[0089] As having good decomposability in water and high wet strength, the water-decomposable fibrous sheet of the invention is usable as wet tissue for application to the skin of human bodies including the private parts thereof, or as cleaning sheets for toilets and thereabouts. To enhance its wiping and cleaning capabilities for those applications, the sheet may previously contain water, surfactant, alcohol, glycerin and the like. Where the water-decomposable fibrous sheet of the invention is, while being previously wetted with liquid detergent and the like, packaged for public sale, it shall be airtightly packaged and put on the market so that it is not spontaneously dried. On the other hand, the water-decomposable fibrous sheet may be marketed in dry. The users who have bought the dry water-decomposable fibrous sheet may wet it with water or liquid chemicals before use.

[0090] Since the water-decomposable fibrous sheet of the invention has high dry strength, any binder or electrolyte may not be added thereto, being different from conventional water-decomposable fibrous sheets. Therefore, the sheet of the invention is highly safe for its application to the skin, and is usable as the sheet component of various water-decomposable absorbent articles including, for example, sanitary napkins, panty liners, sanitary tampons, disposable diapers, etc. For example, when the sheet is perforated, it may be used as the top sheet for water-decomposable absorbent articles. When the sheet is combined with any other fibers, it is usable as an absorbent layer, a cushion layer, a back sheet, etc.

[0091] The fibrous sheet of the invention may be embossed. Where the fibrous sheet is embossed under heating after adding a small amount of water thereto, the strength of the hydrogen bonding between fibers of the fibrillated rayon (and between the fibrillated rayon fibers and the other fibers if contained) will be increased. Therefore, the fibrous sheet after embossing will have a high dry strength. The fibrous sheet of this type is more suitable for use as a wiper or for use as a sheet component constituting an absorbent article.

EXAMPLES

[0092] The invention is described in more detail with reference to the following Examples, which, however, are not intended to restrict the scope of the invention.

Example A:

[0093] Rayon fibers (from Acoordis Japan) having a length of 4mm were fibrillated in a mixer to prepare various types of fibrillated rayon having different degrees of beating as in Table 2 below. The fibrillated rayon was combined with ordinary non-fibrillated rayon (1.7 dtex (1.5 d), fiber length 5 mm) and bleached soft-wood kraft pulp (NBKP) (Canadian Standard Freeness, CSF = 610 cc) and formed into a fibrous web according to a wet paper-making process for which was used a cylinder paper-making machine. In this step, the blend ratio of the fibers was varied in each Example. The fiber length of fibrillated rayon in Tables is meant to indicate the length of rayon fibers before beating treatment.

[0094] Without being dried but still on the plastic wire, the resulting fibrous web put on a running conveyor. While being moved at the speed indicated in Table 2, the fibrous web was subjected to water-jetting treatment under the condition also indicated in Table 2, whereby the fibers constituting it were entangled. The high-pressure water-jetting device used for the treatment was equipped with 2000 nozzles/meter each having an orifice diameter of 95 microns, at intervals of 0.5 mm between the adjacent nozzles, and the pressure of jetting water streams applied to the web was 40 kgf/cm² as in Table 2. In that condition, jetting water was applied to one surface of the web so that it passes through its back surface. The water-jetting treatment was repeated once again under the same condition. Next, this was dried with

a Yankee drier to obtain a water-decomposable fibrous sheet of non-woven fabric. This was then wetted with 250 g, relative to 100 g of the mass of the non-woven fabric, of water. The thus-obtained water-decomposable fibrous sheet was tested for its degree of decomposition in water and its wet strength, according to the methods mentioned below.

5 [0095] The test for the decomposability in water was based on the test of JIS P-4501 indicating the degree of degradability of toilet paper. Precisely, a piece of the water-decomposable fibrous sheet having a length of 10 cm and a width of 10 cm was put into a 300-ml beaker filled with 300 ml of ion-exchanged water, and stirred therein with a rotor. The revolution speed of the rotor was 600 rpm. The condition of the test piece being dispersed in water was macroscopically observed, and the time until the test piece was finely dispersed was measured (see the following Table - the data are expressed in seconds).

10 [0096] The wet strength was measured according to the test method stipulated in JIS P-8135. Briefly, a piece of the fibrous sheet having a width of 25 mm and a length of 150 mm was tested both in the machine direction (MD) and in the cross direction (CD), by the use of a Tensilon tester; for which the chuck distance was 100 mm and the stress rate was 100 mm/min. The strength at break (gf) of the test piece thus measured indicates the wet strength thereof (see the following Table - the data are expressed in g/25 mm). The root of the product of the data in MD and the data in CD was

15 obtained, indicating the mean value of the wet strength of the sample.

[0097] The fibrous sheets of Comparative Examples 1 and 2 were prepared in the same manner as in Example A, except that the fibrillated rayon was not used.

20

25

30

35

40

45

50

55

Table 2

Fibrillated Rayon (1.5 d)	Example A-1		Example A-2		Example A-3		Comp. Example 1		Comp. Example 2	
	4 mm	600 cc	4 mm	600 cc	4 mm	600 cc	4 mm	600 cc	4 mm	600 cc
Fiber Length	5 %	30 %	30 %	30 %	70 %	0 %	0 %	0 %	0 %	0 %
Degree of Beating	30 %	65 %	30 %	40 %	30 %	0 %	30 %	70 %	30 %	30 %
Blend Ratio	40 kg/cm ³	2	40 kg/cm ³	2	40 kg/cm ³	2	40 kg/cm ³	2	40 kg/cm ³	2
Condition for Water-Jetting Treatment	Pressure	Number of Repetitions	Pressure	Number of Repetitions	Pressure	Number of Repetitions	Pressure	Number of Repetitions	Pressure	Number of Repetitions
	50 m/min	45.0	50 m/min	45.0	50 m/min	45.0	50 m/min	45.0	50 m/min	45.0
Basis Weight (g/m ²)	136	130	163	149	235	208	95	87	130	115
Wet Strength (g/25 mm)	MD	CD	MD	CD	MD	CD	MD	CD	MD	CD
	133	95	156	85	221	91	91	122	122	180
Decomposition in Water (seconds)										

[0098] From Table 2, it is seen that fibrillated rayon incorporated into the water-decomposable fibrous sheets enhanced the wet strength of the sheets, as compared with the sheets not containing it, without detracting from the

decomposability thereof in water. This is because the entanglement owing to the presence of the microfibers of the fibrillated rayon enhanced the wet strength of the sheets, and in addition, the entanglement of the microfibers was readily untied to separate the fibers from each other when the sheets were put in a large amount of water. From the data of A-3, it is understood that the water-decomposable fibrous sheet has good decomposability in water and high wet strength, even not containing NBKP.

Example B:

[0099] Water-decomposable fibrous sheets were prepared in the same manner as in Example A. In this Example B, however, used were different types of fibrillated rayon each having different degrees of beating, as in Table 3 below. The fibrous sheets were tested in the same manner as above for their decomposability in water and their wet strength. [0100] The data obtained are given in Table 3.

15

20

25

30

35

40

45

50

55

Table 3

		Example B-1	Example B-2	Example B-3	Example B-4
Fibrillated Rayon (1.5 d)	Fiber Length	4 mm	4 mm	4 mm	4 mm
	Degree of Beating	700 cc	500 cc	300 cc	200 cc
Blend Ratio	Fibrillated Rayon	10 %	10 %	10 %	10 %
	Rayon (1.5 d x 3 mm)	30 %	30 %	30 %	30 %
Condition for Water-Jetting Treatment	NBKCP (degree of beating, 610 cc)	60 %	60 %	60 %	60 %
	Pressure	40 kgf/cm ²	40 kgf/cm ²	40 kgf/cm ²	40 kgf/cm ²
Basis Weight (g/m ²)	Number of Repetitions	2	2	2	2
	Speed	50 m/min	50 m/min	50 m/min	50 m/min
Wet Strength (g/25 mm)	MD	45.0	45.0	45.0	35.0
	CD	145	155	188	165
Decomposition in Water (seconds)	CD	135	149	165	151
	$\sqrt{(CD \times MD)}$	140	152	176	158
		75	82	96	91

Example C:

[0101] Water-decomposable fibrous sheets were prepared in the same manner as in Example A. In this Example C, however, in preparation for fibrillated rayon, used were different types of rayon having different fiber lengths as in
5 Table 4 below. The fibrous sheets of non-woven fabrics were tested in the same manner as above for their decomposability in water and their wet strength.

[0102] A comparative sample of a non-woven fabric was prepared in the same manner as in Example C. For this, however, in preparation for fibrillated rayon, used was rayon having a length of 12 mm. This was tested in the same manner as above.

10 [0103] The data obtained are given in Table 4.

15

20

25

30

35

40

45

50

55

Table 4

Fibrillated Rayon (1.5 d)	Example C-1		Example C-2		Example C-3		Example C-4		Comp. Example	
	Fiber Length	Degrees of Beating	2 mm	4 mm	6 mm	10 mm	12 mm	12 mm	12 mm	12 mm
Blend Ratio	Fibrillated Rayon	Rayon (1.5 d x 5 mm)	600 cc	600 cc	600 cc	600 cc	600 cc	600 cc	600 cc	600 cc
			20 %	20 %	20 %	20 %	20 %	20 %	20 %	20 %
Condition for Water-Jetting Treatment	Pressure	Number of Repetitions	30 %	30 %	30 %	30 %	30 %	30 %	30 %	30 %
			50 %	50 %	50 %	50 %	50 %	50 %	50 %	50 %
Basis Weight (g/m ²)	Wet Strength (g/25 mm)	Speed	40 kgf/cm ²	40 kgf/cm ²	40 kgf/cm ²	40 kgf/cm ²	40 kgf/cm ²	40 kgf/cm ²	40 kgf/cm ²	40 kgf/cm ²
			2	2	2	2	2	2	2	2
Decomposition in Water (seconds)	MD	CD	50 m/min	50 m/min	50 m/min	50 m/min	50 m/min	50 m/min	50 m/min	50 m/min
			45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0
Decomposition in Water (seconds)	MD	CD	143	188	218	274	274	274	274	274
			133	171	193	241	241	241	241	241
Decomposition in Water (seconds)	MD	CD	140	179	203	257	257	257	257	257
			60	71	98	148	148	148	148	148

[0104] From the data of the comparative sample, it is understood that the decomposability in water of the fibrous sheet containing fibrillated rayon prepared from the rayon having a fiber length of 12 mm, or that is, over 10 mm is extremely poor, since the fibers in the sheet were entangled too much. As opposed to this, the decomposability in water

of the fibrous sheet of Example C-4, in which the rayon used have a length of 10 mm, is still good. As in Example C-4 where the primary fibers of the fibrillated rayon used are long, the fibrous sheet could have well-balanced strength and decomposability in water so far as the fibrillated rayon to be used is not beaten too much (so that it could have a large numerical value indicating its degree of beating) and its blend ratio in preparing the sheet is reduced.

5

Example D:

[0105] Water-decomposable fibrous sheets were prepared in the same manner as in Example A. In this Example D, however, in preparation for fibrillated rayon, the rayon used had a fiber length of 3 mm and the blend ratio of the fibers used was varied as in Table 5. In addition, in this, the pressure of water in the water-jetting treatment was varied as in Table 5. The fibrous sheets were tested in the same manner as above for their decomposability in water and their wet strength.

10

[0106] The data obtained are given in Table 5.

15

20

25

30

35

40

45

50

55

Table 5

Fibrillated Rayon (1.5 d)	Ex. D-1	Ex. D-2	Ex. D-3	Ex. D-4	Ex. D-5	Ex. D-6	Ex. D-7
	3 mm	3 mm	3 mm	3 mm	3 mm	3 mm	3 mm
Fiber Length	400 cc	400 cc	400 cc	400 cc	400 cc	400 cc	400 cc
Degree of Beating	20 %	15 %	15 %	10 %	15 %	10 %	5 %
Blend Ratio	20 %	25 %	20 %	25 %	15 %	20 %	25 %
Fibrillated Rayon	60 %	60 %	65 %	65 %	70 %	70 %	70 %
Rayon (1.5 d x 3 mm)	30 kg/cm ²	30 kg/cm ²	30 kg/cm ²	30 kg/cm ²	30 kg/cm ²	30 kg/cm ²	30 kg/cm ²
NBKP (degree of beating 610 cc)	2	2	2	2	2	2	2
Condition for Water-Jetting Treatment	30 m/min	30 m/min	30 m/min	30 m/min	30 m/min	30 m/min	30 m/min
Pressure	50.0	50.0	50.0	50.0	50.0	50.0	50.0
Number of Repetitions	210	198	172	161	168	151	140
Speed	190	171	165	155	150	146	138
Basis Weight (g/m ²)	200	184	168	158	159	148	139
Wet Strength (g/2.5 mm)	110	96	88	82	90	78	63
Decomposition in Water (seconds)							

Example E:

- [0107] Water-decomposable fibrous sheets were prepared in the same manner as in Example A. The sheets were composed of 10 % by mass of fibrillated rayon (1.7 dtex; fiber length of starting rayon, 5 mm; degree of beating, 600 cc), 30 % by mass of rayon (1.1 dtex; fiber length, 5 mm) and 60 % by mass of NBKP used in Example A. For the sheets of Examples E-1 to E-4, the fibrillated rayon was prepared by beating the starting rayon in wet, for which were used different beating machines. The water-jetting treatment was effected twice, under a pressure of 30 kgf/cm² at a processing speed of 30 m/min. In wet and in dry, the fibrous sheets were tested for their strength and decomposability in water in the same manner as above. In addition, their breaking length was obtained in the manner mentioned below.
- [0108] The breaking length was measured according to the test method for the tensile strength of paper and paperboards stipulated in JIS P-8113. Concretely, the breaking length is represented by the following formula:

$$\text{Breaking Length (km)} = [\text{tensile strength (kgf)}] \times 1000 / \{(\text{width of test piece, 25 mm}) \times (\text{basis weight of test piece, g/m}^2)\}$$

- [0109] In Comparative Examples, the same starting rayon (1.7 dtex; fiber length, 5 mm) as that for the samples of Examples E-1 to E-4 was free-beaten, and the free-beaten rayon was used in place of the wet-beaten, fibrillated rayon in Examples, to prepare comparative non-woven fabrics.
- [0110] The data obtained are given in Table 6.

Table 6

Mode of Beating Rayon																
		Comp. Ex. 1		Comp. Ex. 2		E-1		E-2		E-3		E-4				
		free beating		wet beating		pulper		refiner		refiner						
Basis Weight Thickness Dry	strength breaking length	MD	g/m ² mm	beater	beater	mlbxr	pulper	refiner	refiner	refiner	refiner	refiner				
				45.7	40.9	41.3	43.1	39.3	42.1							
				0.45	0.45	0.42	0.45	0.415	0.435							
	strength breaking length	CD	g/25 mm mm	1299	969	1529	1461	1407	1377							
				1137	948	1481	1356	1432	1308							
				915	778	1199	1167	1018	1148							
	strength breaking length		mm	801	761	1161	1083	1036	1091							
				decomposition in water	sec	78 <th rowspan="3">83<th rowspan="3">62<th rowspan="3">93</th></th></th>	83 <th rowspan="3">62<th rowspan="3">93</th></th>	62 <th rowspan="3">93</th>	93							
										strength	MD	g/25 mm mm	126	118	164	143
	breaking length		110 <td rowspan="3">115</td> <td rowspan="3">159</td> <td rowspan="3">133</td> <td rowspan="3">124</td> <td rowspan="3">141</td>										115	159	133	124
strength				CD	g/25 mm mm	129	110	157	156							
						breaking length		113 <td rowspan="3">108</td> <td rowspan="3">152</td> <td rowspan="3">145</td> <td rowspan="3">153</td> <td rowspan="3">152</td>	108	152	145	153				
	decomposition in water	sec	118 <th rowspan="3">120<th rowspan="3">95<td rowspan="3">160</td></th></th>										120 <th rowspan="3">95<td rowspan="3">160</td></th>	95 <td rowspan="3">160</td>	160	

[0111] As in Table 6, it is understood that using the wet-beaten, fibrillated rayon as in the Examples of the invention, but not the free-beaten rayon as in the Comparative Examples, give water-decomposable fibrous sheets having higher

wet strength, especially in the CD direction, though the degree of decomposition in water of the sheets is not so different from that of the sheets in the Comparative Examples.

Example F:

5

[0112] Water-decomposable fibrous sheets were prepared in the same manner as in Example A. In this Example F, however, used were different types of starting rayon having different lengths, and the blend ratio of the fibrillated rayon used was varied, as in Table 7. The water-jetting treatment was effected twice, under a pressure of 30 kg/cm² at a speed of 30 m/min. In wet and in dry, the fibrous sheets of non-woven fabrics were tested for their strength and decom-

10

posability in water in the same manner as above. In addition, their fastness to rubbing was measured in the manner mentioned below.

[0113] The fastness to rubbing was measured according to the test method for the abrasion resistance of paper-boards as stipulated in JIS P-8136. However, in this measurement, a piece of artificial leather was attached to the circular arc area of the rubbing means A, while the sample was attached onto the sliding platform; and the sample was

15

rubbed under a load of 500 g applied thereto with the sliding platform reciprocated.

[0114] The data obtained are given in Table 7.

20

25

30

35

40

45

50

55

Table 7

	F-1	F-2	F-3	F-4	F-5	F-6
	60 %	20 %	60 %	20 %	60 %	20 %
NBKP (beaten)						
Fibrillated Rayon (1.7 diam, degree of beating, 400 cc)	3 mm	80 %				
	5 mm		40 %	80 %		
	7 mm				40 %	80 %
Rayon (1.1 diam x 5 mm)						
WJ Pressure	30	30	30	30	30	30
WJ Speed	30	30	30	30	30	30
Basis Weight	43.1	39.8	42.7	42.7	44.4	44.2
Thickness	0.456	0.322	0.418	0.322	0.391	0.341
Dry Strength	1085	1166	1343	1540	1436	1655
Dry Strength	951	1419	1314	1604	1387	1689
Wet Strength	142	341	307	565	438	678
Wet Strength	128	275	272	493	312	686
Decomposition of Dry Sheet in Water	59	62	107	110	>300	>300
Decomposition of Wet Sheet in Water	64	64	123	168	>300	>300
Fastness to Rubbing	12		19		24	
Fastness to Rubbing	12		20		10	

[0115] As in F-1 and F-2, it is understood that, even though the starting fibers for the fibrillated rayon therein have a length of 3 mm, the non-woven fabrics have relatively high strength and their decomposition in water is good. The

non-woven fabrics of that type could have higher strength while keeping good decomposability in water when the amount of the fibrillated rayon therein is larger. On the other hand, as in F-5 and F-6, it is difficult for the fibrous sheets of non-woven fabrics to have well-balanced decomposability in water and wet strength, when the starting fibers for the fibrillated rayon therein have a length of 7 mm, and, as a result, the decomposability in water of the sheets is lowered in some degree. Accordingly, using fibrillated rayon of which the starting fibers have a length of at most 6 mm gives fibrous sheets having well-balanced decomposability in water and wet strength. However, for the fibrillated rayon of which the starting fibers have a length of 7 mm or more, the fibrous sheets containing it could have well-balanced decomposability in water and wet strength, so far as the amount of the fibrillated rayon therein is reduced and the basis weight of the fibrous sheets is reduced.

10

Example G:

[0116] Water-decomposable fibrous sheets were prepared in the same manner as in Example A. In this Example G, however, used were different types of fibrillated rayon having different degrees of beating, as in Table 8 below. The water-jelling treatment was effected twice, under a pressure of 30 kgf/cm² at a speed of 30 m/min. The fibrous sheets of non-woven fabrics were tested in the same manner as above.

[0117] In addition, the fibrous sheets were tested for the KES flexural strength. In the KES flexure WARP (B/2HB), the KES flexure WEFT (B/2HB), the KES surface WARP (MIU/MMD), and the KES surface WEFT (MIU/MMD), WARP is the same as MD and WEFT is as CD. The value B indicates the flexural toughness, and the sheets having a larger value B are less flexible. (The data of the value B are expressed in g · cm²/cm.) The value 2HB indicates the flexural hysteresis, and the sheets having a larger value 2HB are less restorable. (The data of the value 2HB are expressed in g · cm/cm.) MIU indicates the friction coefficient; and the larger the value MIU is, the poorer the smoothness on the sheet surfaces is. MMD indicates the friction coefficient fluctuation; and the larger the value MMD is, the poorer the degree of smoothness is.

[0118] The data obtained are given in Table 8.

30

35

40

45

50

55

Table 8

NBKP (beaten)	Fibrillated Rayon (1.7 diox x 5 mm)	G-1				G-2				G-3				G-4			
		50 %				10 %				50 %				50 %			
	degree of beating, 600 cc																
	degree of beating, 400 cc																
	degree of beating, 200 cc												10 %				
	degree of beating, 100 cc															10 %	
Rayon (1.7 diox x 5 mm)		40 %				40 %				40 %				40 %			
Basis Weight		42.9				42.1				43.4				43.8			
Absolute Dry Basis Weight		41.1				40.0				40.3				40.3			
Thickness		0.438				0.390				0.402				0.377			
Dry Strength	MD	974				1146				1308				1380			
Dry Strength	CD	870				1011				1128				1136			
Wet Strength	MD	121				159				194				222			
Wet Strength	CD	118				151				198				220			
Absolute Wet Strength		119.49				154.95				195.99				221.00			
Decomposition in Water of Dry Sheet		76				71				66				79			
Decomposition in Water of Wet Sheet		93				97				87				81			
KES Flexure WARP	B	0.374				0.440				0.502				0.503			
	ZHB	0.676				1.074				1.074				1.109			
KES Flexure WEFT	B	0.237				0.300				0.244				0.294			
	ZHB	0.403				0.354				0.253				0.489			
KES Surface WARP	MTU	0.140				0.195				0.194				0.153			
	MMMD	0.125				0.131				0.130				0.125			
KES Surface WEFT	MTU	0.157				0.166				0.203				0.148			
	MMMD	1.020				0.695				0.907				1.075			

[0119] From the data in Table 8, it is understood that the fibrous sheets produced in Examples all have good decomposability in water and high wet strength. In particular, it is seen that the sheets of G-4 and G-5 are good.

[0120] The data of the absolute wet strength and the decomposability in water of wet samples given in Table 8 are plotted relative to the varying degrees of beating of the fibrillated rayon used, as in Fig. 11 showing the graph of the data. From Fig. 11, it is seen that the wet strength of the samples was higher, when the rayon to be the fibrillated rayon was beaten more (that is, the fibrillated rayon used had a smaller numerical value indicating the degree of beating).
5 However, with reference to the degree of decomposition in water of the samples prepared herein, it is seen that the samples in which the fibrillated rayon used was beaten more to have a numerical value indicating the degree of beating of smaller than 400 cc have a higher wet strength but have a lower degree of decomposition in water. Accordingly, it is understood that the water-decomposable fibrous sheets of the invention have the advantage of augmenting both the decomposability in water and the wet strength, though the two properties, decomposability in water and wet strength of
10 the sheets would be seemingly contradictory to each other.

Example H:

[0121] Water-decomposable fibrous sheets were prepared in the same manner as in Example G, and tested for
15 their properties in the same manner as above.

[0122] Apart from those, comparative fibrous sheets were prepared for Comparative Examples 1 to 3. Precisely, in Comparative Example 1, used was rayon having a degree of beating of 740 cc and the fibrous sheet was prepared in the same manner as in Example G; and in Comparative Examples 2 and 3, fibrillated rayon was not used. In those Comparative Examples 2 and 3, the fibrous webs were subjected to water-jetting treatment twice under a pressure of
20 44 kgf/cm² at a processing speed of 15 m/min. The comparative fibrous sheets were also tested for their properties.

[0123] The data obtained are given in Table 9 below.

25

30

35

40

45

50

55

Table 9

		Com. Ex. 1	H-1	H-2	H-3	H-4	Com. Ex. 2	Com. Ex. 3
		20 %	20 %	20 %	20 %	20 %	60 %	30 %
NBKP (beaten) Fibrillated Rayon (1.7 diox x 5 mm)	degree of beating, 740 cc	80 %						
	degree of beating, 600 cc							
	degree of beating, 400 cc		80 %					
	degree of beating, 200 cc			80 %				
	degree of beating, 100 cc				80 %			
Rayon (1.7 diox x 5 mm)								
Basis Weight		42.8	42.5	44.4	42.0	40.5	40 %	70 %
Thickness		0.477	0.372	0.387	0.322	0.287	0.556	46.5
Dry Strength	MD	377	812	1493	1624	1611	957	315
Dry Strength	CD	370	1061	1500	1883	1603	672	446
Wet Strength	MD	157	176	508	340	612	139	154
Wet Strength	CD	66	215	509	491	487	101	131
Absolute Wet Strength	g/2.5 mm	102	195	508	515	346	118	143
Decomposition in Water of Dry Sheets	sec	>300	>300	>300	104	107	122	144
Decomposition in Water of Wet Sheets	sec	>300	>300	>300	175	141	128	204
KES Flexure WARP	B	0.170	0.423	0.702	0.463	0.406	-	-
	2HB	0.167	0.762	1.372	0.817	0.608	-	-
KES Flexure WEFT	B	0.112	0.350	0.326	0.354	0.309	-	-
	2HB	0.0966	0.447	0.578	0.579	0.393	-	-
KES Surface WARP	MTU	0.156	0.146	0.179	0.164	0.151	-	-
	MMD	0.0115	0.0151	0.0134	0.0146	0.0113	-	-
KES Surface WEFT	MTU	0.160	0.170	0.158	0.154	0.158	-	-
	MMD	0.0765	0.0997	0.121	0.0992	0.0611	-	-
Fatness to Rubbing	MD	11	7	19	28	14	8	12
Fatness to Rubbing	CD	11	7	9	16	13	7	9

[0124] As in Table 9, it is understood that the fibrous sheets containing a larger amount of fibrillated rayon not beaten so much (to have a larger numerical value indicating the degree of beating) have a lower degree of decomposition in water. In Example H, the samples H-3 and H-4 have well-balanced decomposability in water and wet strength.

Therefore, when a larger amount (for example, at least 80 % by mass) of fibrillated rayon is to be in the fibrous sheets, it is desirable to use fibrillated rayon having a degree of beating of at most 200 cc.

Example I:

5

[0125] Water-decomposable fibrous sheets were prepared in the same manner as in Example G. In this Example I, however, the amount of the fibrillated rayon added to the sheets varies, as in Table 10 below. In addition, in this Example I, rayon (non-fibrillated rayon) was not added to the sheets. The fibrous sheets of non-woven fabrics were tested for their properties in the same manner as above.

10

[0126] The comparative fibrous sheet (Comparative Example) was prepared in the same manner as in Example G to contain 3 % by mass of fibrillated rayon.

[0127] The data obtained are given in Table 10.

15

20

25

30

35

40

45

50

55

Table 10

	Comp. Hx.	I-1	I-2	I-3	I-4	I-5
NBKP (beaten)	97 %	95 %	93 %	10 %	5 %	0 %
Fibrillated Rayon (1.7 diox x 5 mm; degree of beating, 200 cc)	3 %	5 %	7 %	90 %	95 %	100 %
Basis Weight	42.4	41.9	42.6	45.5	44.1	43.0
Thickness	0.512	0.490	0.473	0.392	0.396	0.382
Dry Strength	1147	1172	1316	1932	1990	2185
Dry Strength	957	878	1029	1656	1631	1697
Wet Strength	67	84	97	590	617	663
Wet Strength	61	81	103	579	568	627
Decomposition in Water of Dry Sheets	69	66	79	71	73	57
Decomposition in Water of Wet Sheets	67	74	98	84	80	66

[0128] As in Table 10, the fibrous sheets containing at least 5 % by mass, but preferably at least 7 % by mass of fibrillated rayon have good decomposability in water and their wet strength is satisfactory to some degree. From the

data obtained, in addition, it has been confirmed that the fibrous sheets of non-woven fabrics containing fibrillated rayon alone, but not containing non-fibrillated rayon, have a considerably high degree of decomposition in water, still having a considerably high strength. However, it is seen that, if the amount of fibrillated rayon added is too small, for example, the amount is 3 % by mass, the wet strength of the fibrous sheet is considerably low.

Example J:

[0129] Water-decomposable fibrous sheets were prepared in the same manner as in Example G. In this Example J, however, the fineness of the fibrillated rayon added to the sheets varies, as in Table 11 below. The fibrous sheets of non-woven fabrics were tested for their properties in the same manner as above. For the measurement, n (number of samples tested) = 3.

[0130] The data obtained are given in Table 11.

Table 11

			J-1	J-2
NBKP (beaten)			20%	20%
Fibrillated Rayon (degree of beating, 200 cc)	1.4 dtex		80 %	
	1.7 dtex			80%
Basis Weight			41.6	45
Thickness			0.36	0.37
Dry Strength	MD		2064	1762
			2019	1588
			2156	1978
		AVE	2080	1775
		Standard Deviation	50.9	135.1
		Breaking length (m)	2000	1577
	CD		1743	1809
			1663	1696
			1649	1761
		AVE	1685	1755
		Standard Deviation	38.7	39.6
		Breaking Length (m)	1620	1560

Table 11 (continued)

			J-1	J-2
Wet Strength	MD		733	628
			607	527
			578	644
		AVE	639	600
		Standard Deviation	62.4	48.4
		Breaking Length (m)	614	533
	CD		629	609
			649	521
			514	586
		AVE	597	572
		Standard Deviation	55.6	34.0
		Breaking Length (m)	574	508
Decomposition in Water of Dry Sheets			92	96
Decomposition in Water of Wet Sheets			107	98

[0131] As in Table 11, there is found little difference in the decomposability in water between J-1 and J-2. On the other hand, the samples of J-1, to which was added finer fibrillated rayon having a smaller fineness, have higher dry strength and higher wet strength. Accordingly, it is understood that using finer fibrillated rayon having a smaller fineness gives fibrous sheets having higher strength, without lowering the degree of decomposition in water of the sheets.

Example K:

[0132] Water-decomposable fibrous sheets were prepared in the same manner as in Example A. In this Example K, however, the fibrous sheets were made in a hand-papermaking method, and were not subjected to water-jetting treatment. The fibrous sheets were tested for their properties in the same manner as above. Since the sheets were made in a hand-papermaking method, there is no difference between the strength in MD and that in CD.

[0133] The data obtained are given in Table 12.

Table 12

Sample No.		K-1	K-2	K-3
NBKP (beaten)		20 %	20 %	20 %
Fibrillated Rayon (1.7 dtex × 5 mm)	degree of beating, 600 cc	80 %		
	degree of beating, 400 cc		80 %	
	degree of beating, 200 cc			80%
Basis Weight	g/m ²	46.5	44.6	41.7
Thickness	mm	0.289	0.266	0.194
Dry Strength	g/25 mm	701	1050	1640
Wet Strength	g/25 mm	99	135	253
Decomposition in Water of Dry Sheets	sec	>300	52	30
Decomposition in Water of Wet Sheets	sec	>300	43	21
Fastness to Rubbing	number of repetitions	5	3	5

[0134] As in Table 12, the samples though K-1 to K-3 all have high dry strength, owing to the hydrogen bonding power of the microfibrils of the fibrillated rayon. In addition, the samples of K-2 and K-3 have high wet strength and good decomposability in water. Presumably, such high wet strength is due to strong hydrogen bonding and entanglement of the microfibrils. Therefore, it is possible to obtain fibrous sheets having a high degree of decomposition in water and having high strength both in wet and dry even in a paper-making process not comprising a step of water-jetting treatment, so far as the fibrillated rayon used falls within the scope of the invention. However, when fibrillated rayon having been much beaten (therefore having a small numerical value indicating the degree of beating) is used in producing fibrous sheets, it is desirable that the amount of the fibrillated rayon to be added to the fibrous sheets is increased. The sample of K-1 has a low degree of decomposition in water. This is because the rayon not having been fibrillated much was used in the sample of K-1. Therefore, when fibrillated rayon having a degree of beating of 600 cc or so is used in producing fibrous sheets in a paper-making method, the amount of the fibrillated rayon to be added to the fibrous sheets is preferably reduced whereby the decomposability in water of the fibrous sheets produced could be increased further more.

[0135] In addition, the water-decomposable fibrous sheet not subjected to water jetting treatment may be combined with the water-decomposable fibrous sheet subjected to water-jetting treatment to form a laminate structure. Such a laminate sheet could bear wiping easily.

Example L:

[0136] Water-decomposable fibrous sheets were prepared in the same manner as in Example K. That is, the fibrous sheets were made in a hand-papermaking method, and were not subjected to water-jetting treatment. In this hand-papermaking method, used was a square-shape sheet machine, and the resulting square-shaped sheets were dried with a rotary dryer. For fibrillated rayon, solvent-spun cellulose fibers (1.7 dtex, fiber length 5 mm, from Acordis Japan) were fibrillated in a table mixer to have a degree of beating of 200 cc. Pulp was beaten in a refiner to have a degree of beating of 600 cc. For non-fibrillated rayon, rayon fibers (1.7 dtex, fiber length 5 mm) were used as they were. The basis weight of each sheet was 40 g/m². For the measurement of the fibrous sheets in wet the fibrous sheets were infiltrated with 250 g, relative to 100 g of the mass of the fibrous sheets, of water, and then allowed to stand for 24 hours.

[0137] The tearing resistance in dry was measured according to JIS P-8116 such that the water-decomposable fibrous sheet thus prepared was cut into a piece having a width of 25 mm and a length of 150 mm; and it was tested by the use of a Tensilon tester, for which the chuck distance was 100 mm and the stress rate was 300 mm/min (see the following Table - the data are expressed in g).

[0138] Also, the degree of extension in wet was measured.

[0139] The data obtained are given in Table 13.

Table 13

	Comparative Example					Example				
	1	2	3	4	5	L-1	L-2	L-3	L-4	L-5
NBKP	100%	70%	50%	30%	0%	97%	95%	90%	80%	70%
Rayon	0%	30%	50%	70%	100%	3%	5%	10%	20%	30%
Dry Strength(g/25mm)	2925	1918	1115	602	-	3355	3635	3858	3159	2682
Wet Strength(g/25mm)	60	83	66	45	-	102	112	125	183	201
Degree of Extension in Wet(%)	1.2	3.68	4.38	7.76	-	2.54	3.42	3.35	4.12	4.68
Decomposition in Water(sec)	27	21	11	9	-	20	18	19	26	30
Tearing Resistance in Dry(g)	102	93	61	33	-	112	130	155	159	162

	Example														
	L-6	L-7	L-8	L-9	L-10	L-11	L-12	L-13	L-14	L-15	L-16	L-17	L-18	L-19	L-20
NBKP	50%	30%	20%	10%	0%	80%	70%	50%	30%	10%	-	-	-	-	-
Fibrillated Rayon	50%	70%	80%	90%	100%	10%	10%	10%	10%	10%	10%	30%	50%	70%	90%
Rayon	-	-	-	-	-	10%	20%	40%	60%	80%	90%	70%	50%	30%	10%
Dry Strength(g/25mm)	2251	1791	1621	1499	1099	2586	2117	1388	969	549	438	551	674	793	879
Wet Strength(g/25mm)	254	263	271	275	296	115	109	99	83	67	54	106	163	207	236
Degree of Extension in Wet(%)	6.29	7.73	8.29	8.11	7.89	3.77	4.41	5.32	7.17	8.31	8.76	8.43	8.34	8.25	7.94
Decomposition in Water(sec)	29	31	29	26	29	21	26	29	27	31	32	33	31	32	31
Tearing Resistance in Dry(g)	177	187	193	199	206	119	108	84	76	66	51	83	118	147	164

[0140] As in Table 13, when the proportion of the non-fibrillated rayon was 100 %, the fibers could not be bound together in the hand-papermaking method, and therefore it was impossible to form a fibrous sheet only from the non-

fibrillated rayon. On the other hand, as in the sample L-10 according to the invention, the fibrous sheet could be formed in the hand-papermaking method even when the proportion of the fibrillated rayon was 100 %. This fibrous sheet has a good decomposability in water and a high wet strength.

[0141] In addition, the samples according to the invention have a high degree of extension and a high tearing resistance. Therefore, it is seen that the fibrous sheet of the invention is excellent in durability when used for wiping.

Example M:

[0142] Water-decomposable fibrous sheets were prepared in the same manner as in Example L. In this Example M, however, the amount of water to be infiltrated into the sheets were varied among the samples.

[0143] The data obtained are given in Table 14.

Table 14

	Rate of Impregnation of Water (relative to the self weight of sample)	M-1	M-2	M-3	M-4	M-5
NBKP		97%	95%	90%	80%	70%
Fibrillated Rayon		3%	5%	10%	20%	30%
Dry Strength (g/25mm)		3355	3635	3858	3159	2682
Wet Strength (g/25mm)	100%	296	247	367	537	565
Degree of Extension in Wet (%)	100%	3.57	3.39	5.3	5.72	5.89
Wet Strength (g/25mm)	250%	102	112	125	183	201
Degree of Extension in Wet (%)	250%	2.54	3.42	3.35	4.12	4.68
Wet Strength (g/25mm)	320%	48	52	60	89	102

[0144] As in Table 14, the water-decomposable fibrous sheet of the invention can procure a relatively high wet strength even when a large amount of water is contained.

[0145] As will be understood from the data given hereinabove, the water-decomposable fibrous sheets of the invention have good decomposability in water and high wet strength, as containing fibrillated rayon with microfibers formed around its primary fibers and therefore capable of taking the advantage of the microfibers entangled with fibers and/or their hydrogen bonding power. In addition, as will be also understood from the Examples, it is possible to make the water-decomposable fibrous sheets of the invention have well-balanced decomposability in water and wet strength by varying the fiber length and the fineness of the fibrillated rayon and other fibers to be in the sheets, the degree of beating in preparing the fibrillated rayon, the blend ratios of the fibrillated rayon and other fibers to be in the sheets, and the basis weight of the sheets. Moreover, when the fibrous sheet is used for wiping operation, because the microfibers of the fibrillated rayon come into contact with the surface to be wiped, the friction against the fibrous sheet will be low. Therefore, the fibrous sheet of the invention is excellent in durability.

[0146] When subjected to water-jetting treatment, the water-decomposable fibrous sheets of the invention could be more bulky to have a soft feel.

[0147] Even though not subjected to water-jetting treatment but prepared for example in a papermaking process, the fibrous sheets could have good decomposability in water and high wet and dry strength.

[0148] While the invention has been described in detail and with reference to specific embodiments thereof, it will be apparent to one skilled in the art that various changes and modifications can be made therein without departing from the spirit and scope thereof.

Claims

1. A water-decomposable fibrous sheet, comprising from 3% by mass to 100% by mass of fibrillated rayon comprising primary fibers and microfibers extending therefrom, and from 0% by mass to 97% by mass of other fibers having a length of at most 10 mm, wherein:

the fibrillated rayon has a degree of beating of at most 700 cc; the primary fibers have a length in a range of from 1.8 mm to 10 mm at a peak of mass distribution thereof; and at least the microfibers extending from the primary fibers of the fibrillated rayon are entangled with at least one of other primary fibers, other microfibers extending from the other primary fibers and the other fibers.

5

2. A water-decomposable fibrous sheet, comprising from 3% by mass to 100% by mass of fibrillated rayon comprising primary fibers and microfibers extending therefrom, and from 0% by mass to 97% by mass of other fibers having a length of at most 10 mm, wherein:

10

the primary fibers have a length in a range of from 1.8 mm to 10 mm at a peak of mass distribution thereof; the microfibers having a length of at most 1 mm account for from 0.1 to 65% by mass of the self-weight of the fibrillated rayon; and at least the microfibers extending from the primary fibers of the fibrillated rayon are entangled with at least one of the other primary fibers, other microfibers extending from the other primary fibers and the other fibers.

15

3. A water-decomposable fibrous sheet, comprising from 3% by mass to 100% by mass of fibrillated rayon comprising primary fibers and microfibers extending therefrom, and from 0% by mass to 97% by mass of other fibers having a length of at most 10 mm, wherein:

20

the fibrillated rayon has a degree of beating of at most 700 cc; the primary fibers have a length in a range of from 1.8 mm to 10 mm at a peak of mass distribution thereof; and at least the microfibers extending from the primary fibers of the fibrillated rayon are hydrogen bonded with at least one of other primary fibers, other microfibers extending from the other primary fibers and the other fibers.

25

4. A water-decomposable fibrous sheet, comprising from 3% by mass to 100% by mass of fibrillated rayon comprising primary fibers and microfibers extending therefrom, and from 0% by mass to 97% by mass of other fibers having a length of at most 10 mm, wherein:

30

the primary fibers have a length in a range of from 1.8 mm to 10 mm at a peak of mass distribution thereof; the microfibers having a length of at most 1 mm account for from 0.1 to 65% by mass of the self-weight of the fibrillated rayon; and at least the microfibers extending from the primary fibers of the fibrillated rayon are hydrogen bonded with at least one of other primary fibers, other microfibers extending from the other primary fibers and the other fibers.

35

5. The water-decomposable fibrous sheet as claimed in any one of Claims 1 to 4, wherein the primary fibers have a length of from 2.5 mm to less than 4.5 mm at a peak of mass distribution thereof and the fibrillated rayon has a degree of beating of smaller than 400 cc.

40

6. The water-decomposable fibrous sheet as claimed in Claim 5, wherein the microfibers having a length of at most 1 mm account for from 0.5 to 15% by mass of the self-weight of the fibrillated rayon.

45

7. The water-decomposable fibrous sheet as claimed in any one of Claims 1 to 4, wherein the primary fibers have a length of from 2.5 mm to less than 4.5 mm at a peak of mass distribution thereof and the fibrillated rayon has a degree of beating of from 400 cc to 700 cc.

50

8. The water-decomposable fibrous sheet as claimed in Claim 7, wherein the microfibers having a length of at most 1 mm account for from 0.1 to 5% by mass of the self-weight of the fibrillated rayon.

9. The water-decomposable fibrous sheet as claimed in any one of Claims 1 to 4, wherein the primary fibers have a length of from 4.5 mm to 7.5 mm at a peak of mass distribution thereof and the fibrillated rayon has a degree of beating of smaller than 400 cc.

55

10. The water-decomposable fibrous sheet as claimed in Claim 9, wherein the microfibers having a length of at most 1 mm account for from 8 to 65% by mass of the self weight of the fibrillated rayon.

11. The water-decomposable fibrous sheet as claimed in any one of Claims 1 to 4, wherein the primary fibers have a length of from 4.5 mm to 7.5 mm at a peak of mass distribution thereof and the fibrillated rayon has a degree of beating of from 400 cc to 700 cc.

12. The water-decomposable fibrous sheet as claimed in Claim 11, wherein the microfibers having a length of at most 1 mm account for from 0.3 to 50% by mass of the self-weight of the fibrillated rayon.
- 5 13. The water-decomposable fibrous sheet as claimed in any one of Claims 1 to 4, wherein the fibers having a length of at most 10 mm are biodegradable fibers.
- 10 14. The water-decomposable fibrous sheet as claimed in Claim 13, wherein the biodegradable fibers are those of at least one selected from the group consisting of regenerated cellulose, pulp, aliphatic polyesters, polyvinyl alcohol and collagen.
- 15 15. The water-decomposable fibrous sheet as claimed in any one of Claims 1 to 4, of which the basis weight falls between 20 and 100 g/m².
16. The water-decomposable fibrous sheet as claimed in any one of Claims 1 to 4, which has a degree of decomposition in water of at most 200 seconds, as measured according to JIS P-4501.
17. The water-decomposable fibrous sheet as claimed in any one of Claims 1 to 4, which has a wet strength of at least 110 g/25 mm.
- 20 18. The water-decomposable fibrous sheet as claimed in any one of Claims 1 to 4, which has a dry strength of at least 350 g/25 mm.
- 25 19. The water-decomposable fibrous sheet as claimed in Claim 1 or Claim 2, which is a non-woven fabric having been subjected to water-jetting treatment.
- 30 20. The water-decomposable fibrous sheet as claimed in any one of Claims 1 to 4, wherein the fineness of the fibrillated rayon is from 1.2 to 1.9 dtex.
- 35 21. The water-decomposable fibrous sheet as claimed in any one of Claims 1 to 4, wherein the primary fibers have a length of 3 ± 0.5 mm at a peak of mass distribution thereof, and the microfibers having a length of at most 1 mm account for from 0.1 to 10% by mass of the self-weight of the fibrillated rayon.
- 40 22. The water-decomposable fibrous sheet as claimed in any one of Claims 1 to 4, wherein the primary fibers have a length of 4 ± 0.5 mm at a peak of mass distribution thereof, and the microfibers having a length of at most 1 mm account for from 1 to 14% by mass of the self-weight of the fibrillated rayon.
- 45 23. The water-decomposable fibrous sheet as claimed in any one of Claims 1 to 4, wherein the primary fibers have a length of 5 ± 0.5 mm at a peak of mass distribution thereof, and the microfibers having a length of at most 1 mm account for from 0.3 to 45% by mass of the self-weight of the fibrillated rayon.
- 50 24. The water-decomposable fibrous sheet as claimed in any one of Claims 1 to 4, wherein the primary fibers have a length of 6 ± 0.5 mm at a peak of mass distribution thereof, and the microfibers having a length of at most 1 mm account for from 5 to 50% by mass of the self-weight of the fibrillated rayon.
- 55 25. The water-decomposable fibrous sheet as claimed in any one of Claims 1 to 4, wherein the primary fibers have a length of 7 ± 0.5 mm at a peak of mass distribution thereof, and the microfibers having a length of at most 1 mm account for from 10 to 65% by mass of the self weight of the fibrillated rayon.
26. The water-decomposable fibrous sheet as claimed in Claim 3 or Claim 4, which is produced in a paper-making process.
27. A water-decomposable fibrous sheet, comprising from 3 to 100% by mass of fibrillated rayon of such that primary fibers constituting it have a length of from 1.8 to 10 mm, and from 0 to 97% by mass of other fibers having a length of at most 10 mm, and having;
a basis weight of from 20 to 100 g/m², a thickness of at least 0.2 mm, a degree of decomposition in water in a previously wetted condition as measured according to JIS P-4501 of at most 200 seconds, and a wet strength of at least 110 g/25 mm.

EP 1 024 225 A1

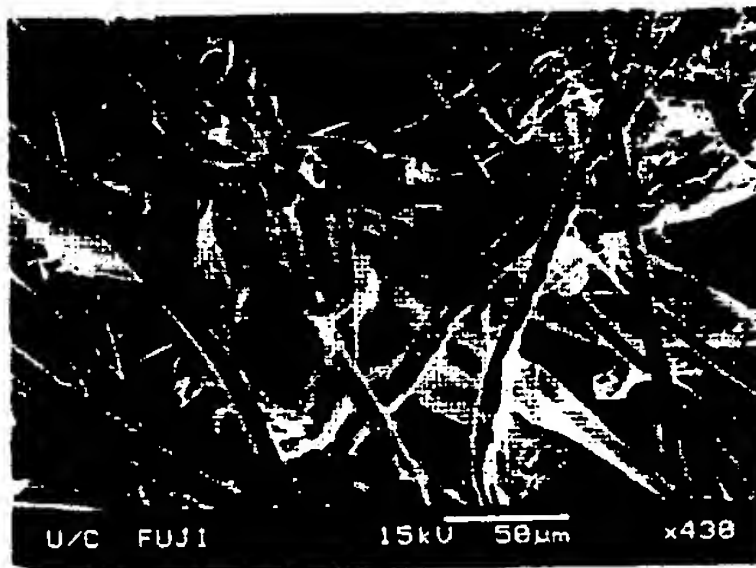


Fig.1

Fig. 2

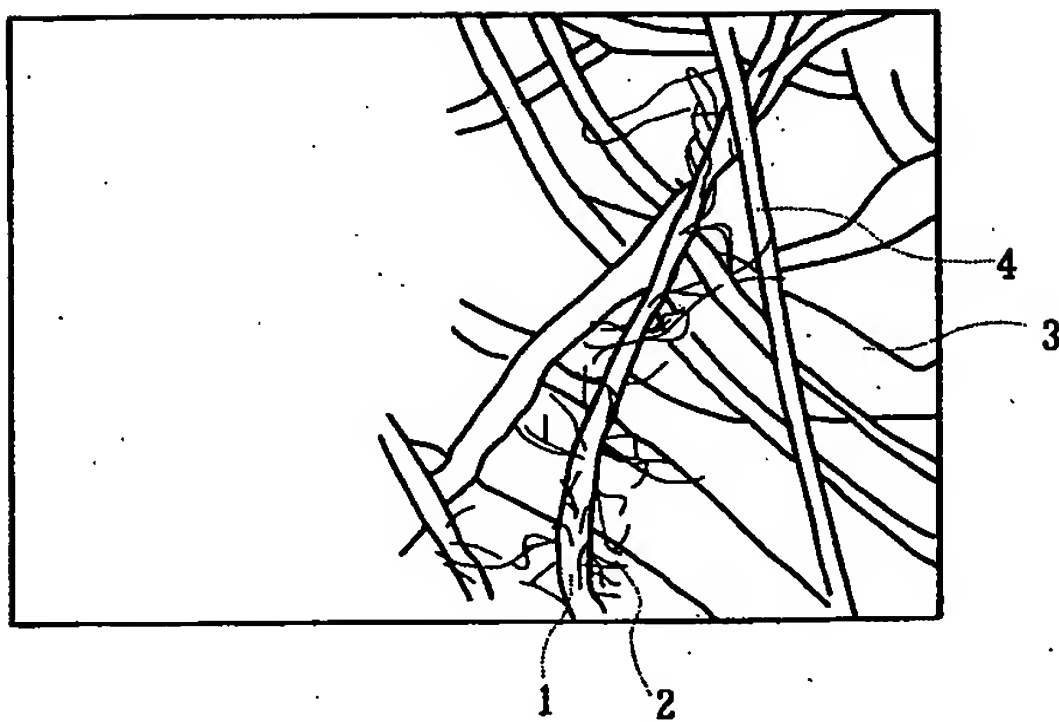


Fig.3

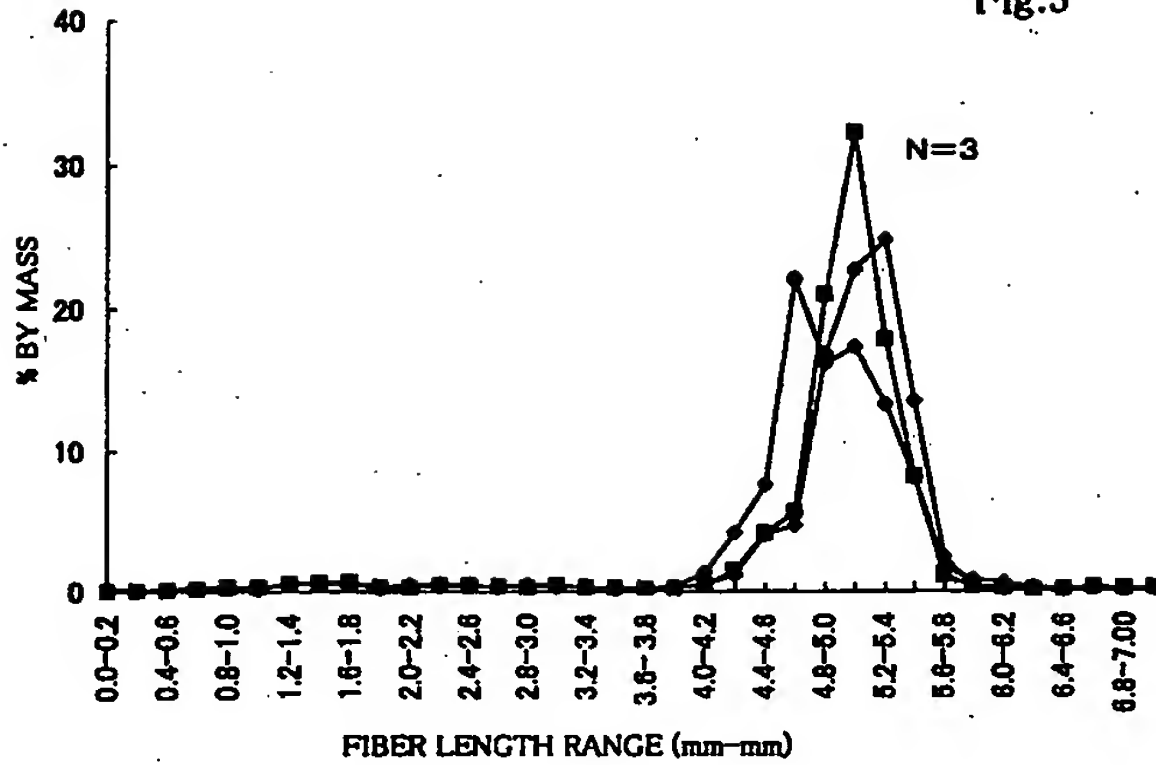


Fig.4

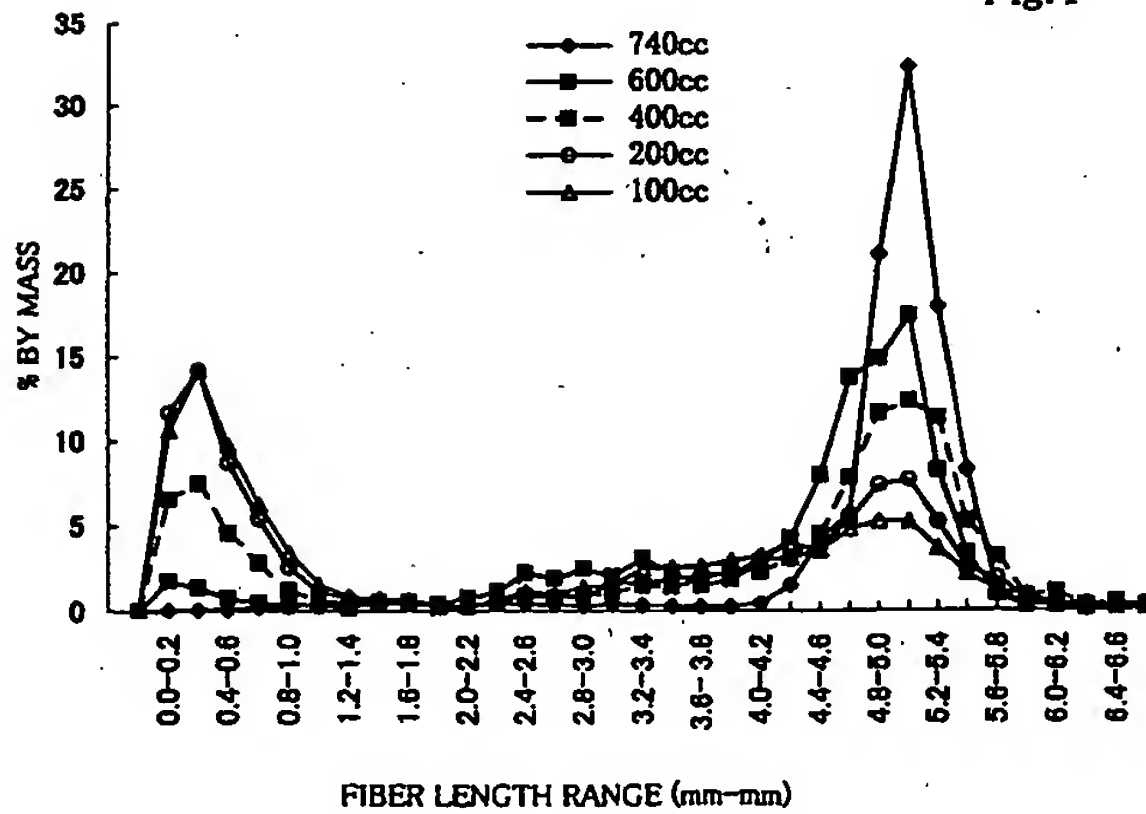
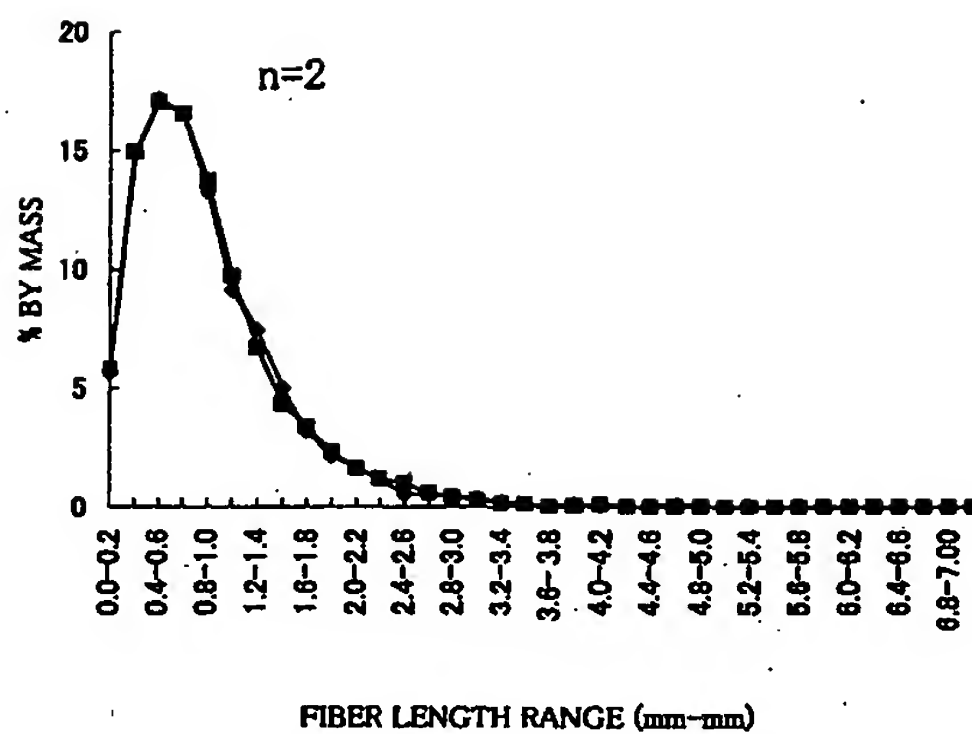


Fig.5



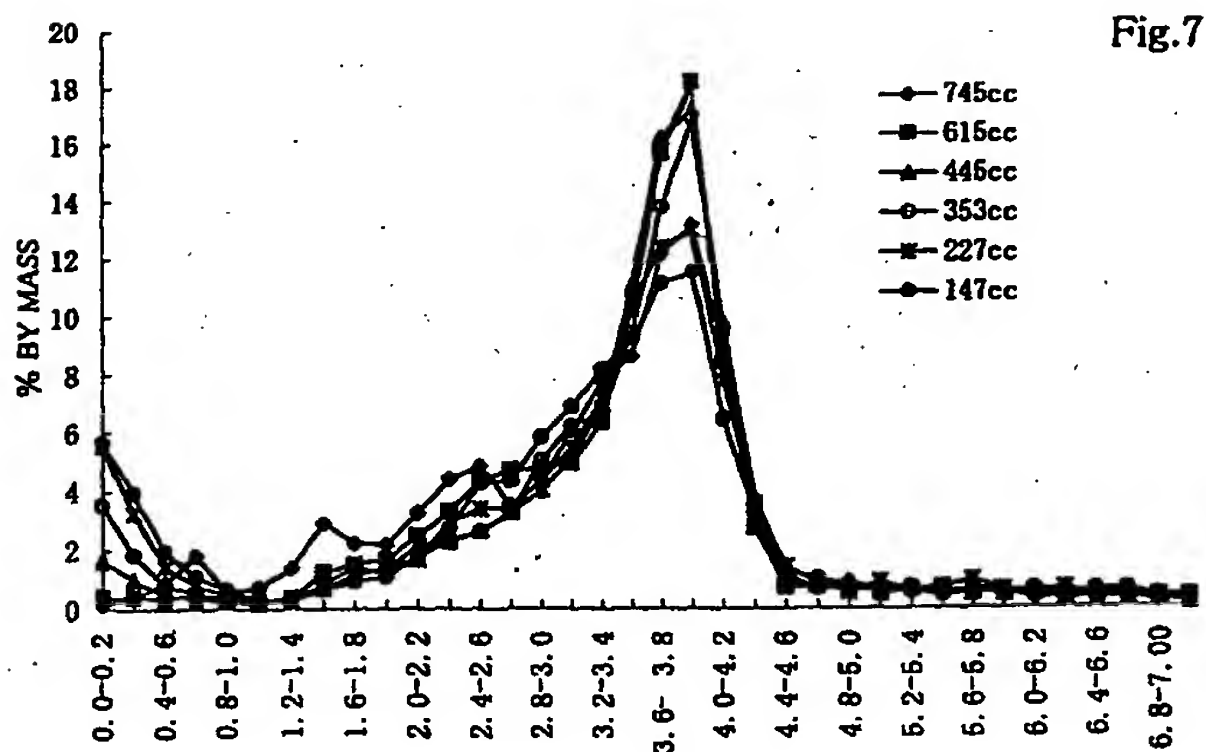
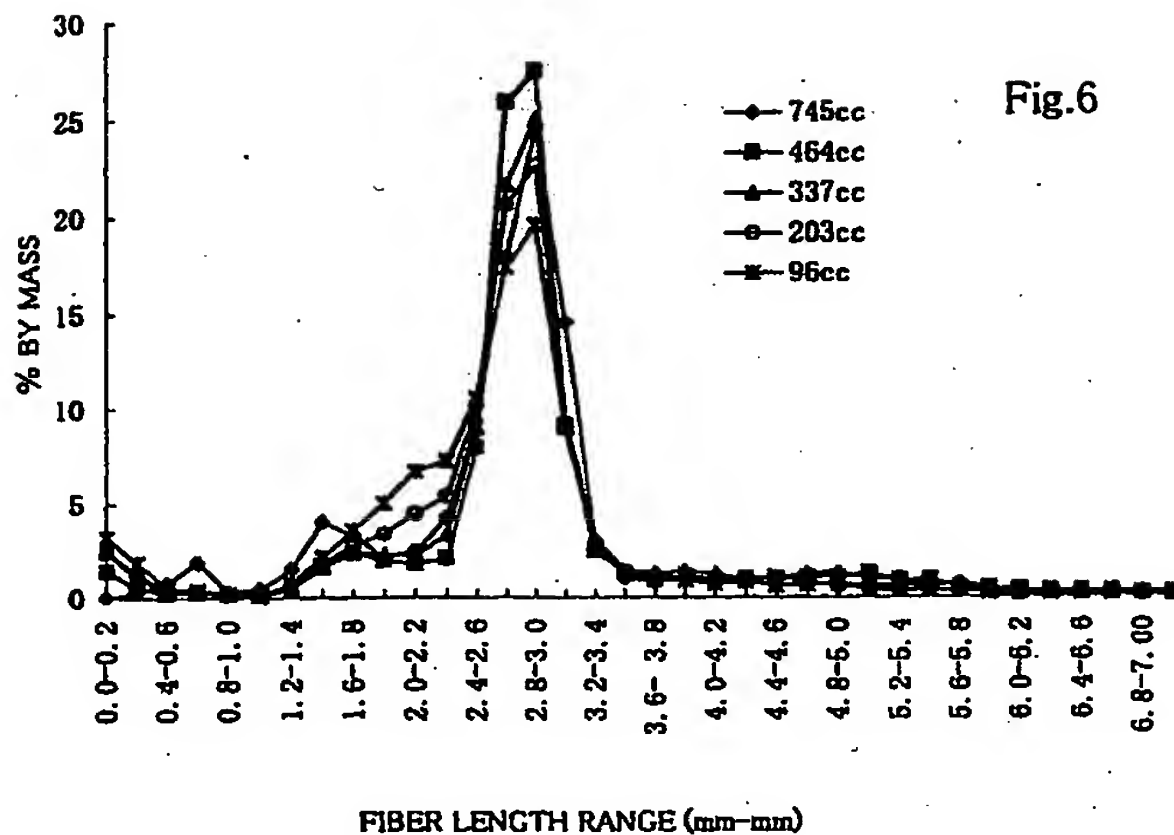


Fig.8

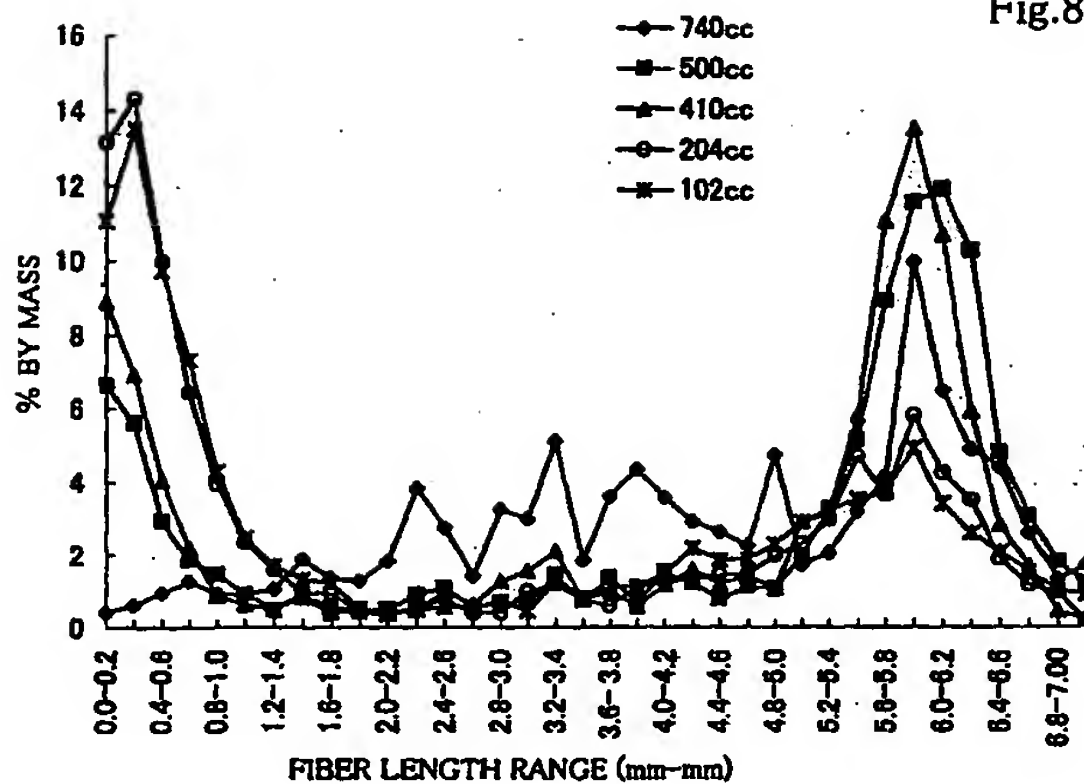


Fig.9



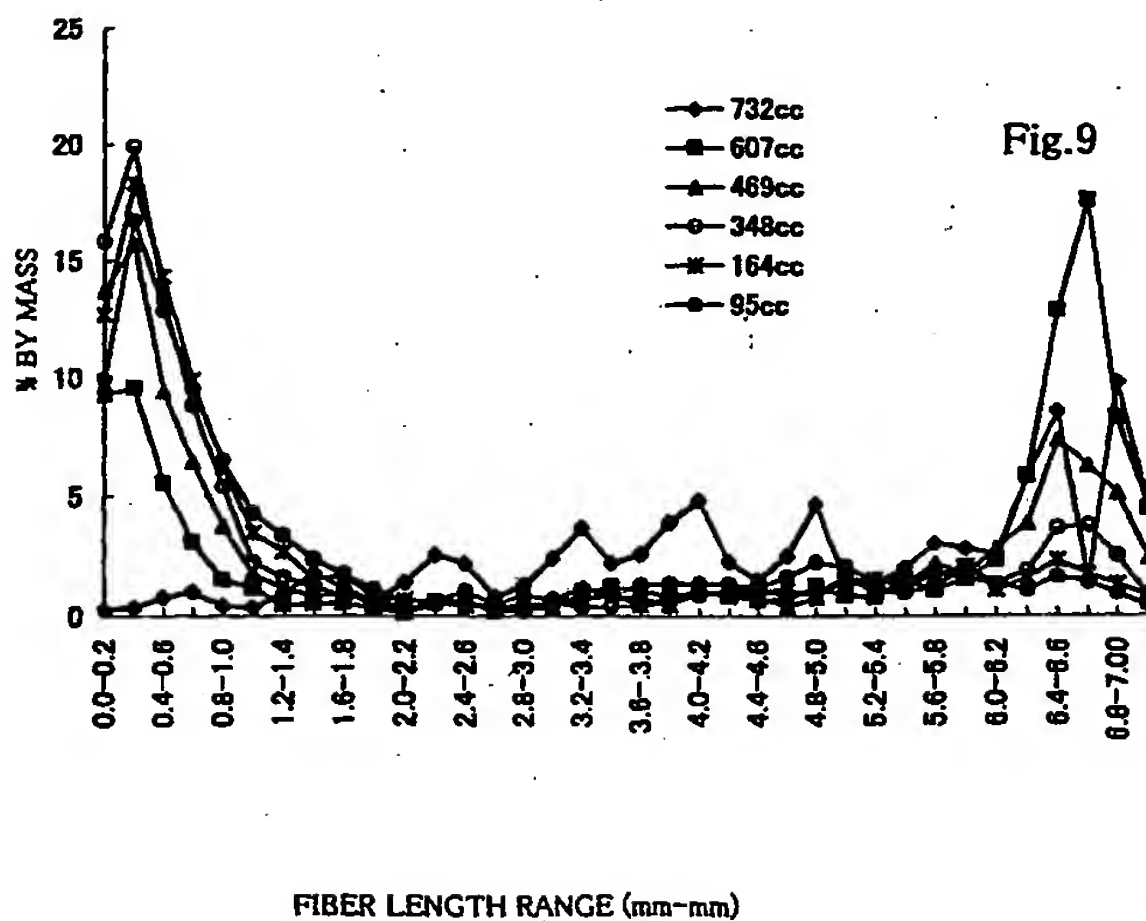


Fig.10



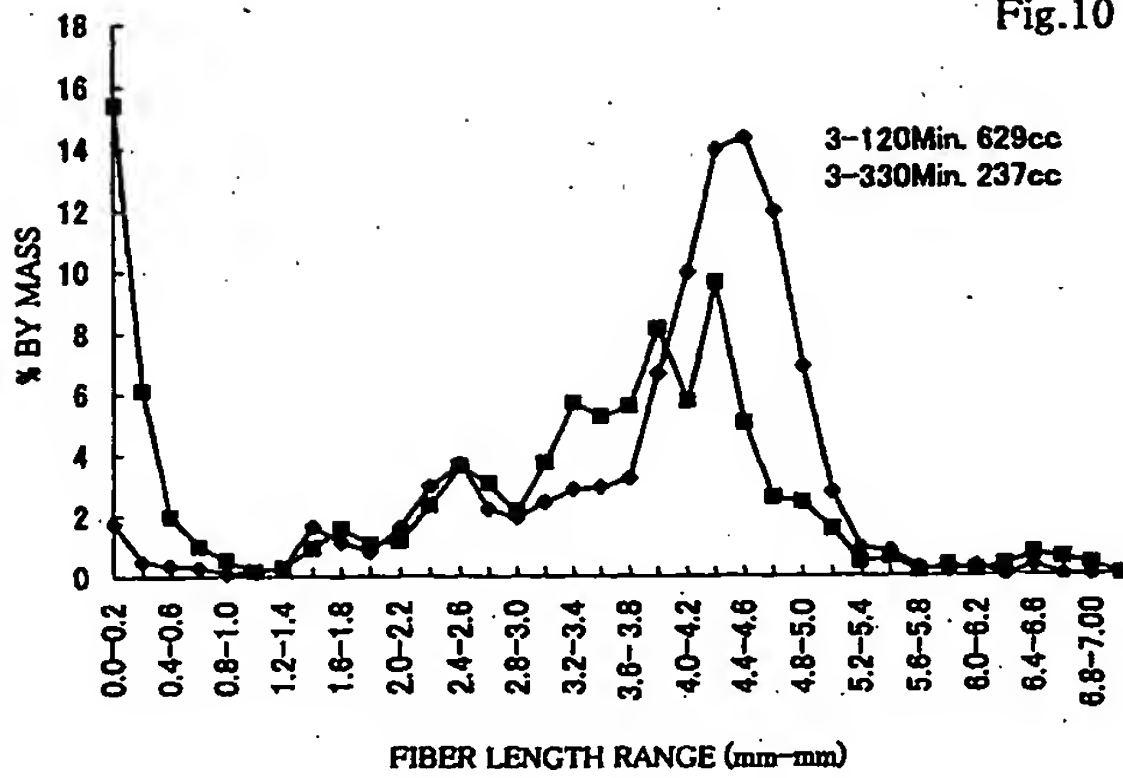

EP 1 024 225 A1

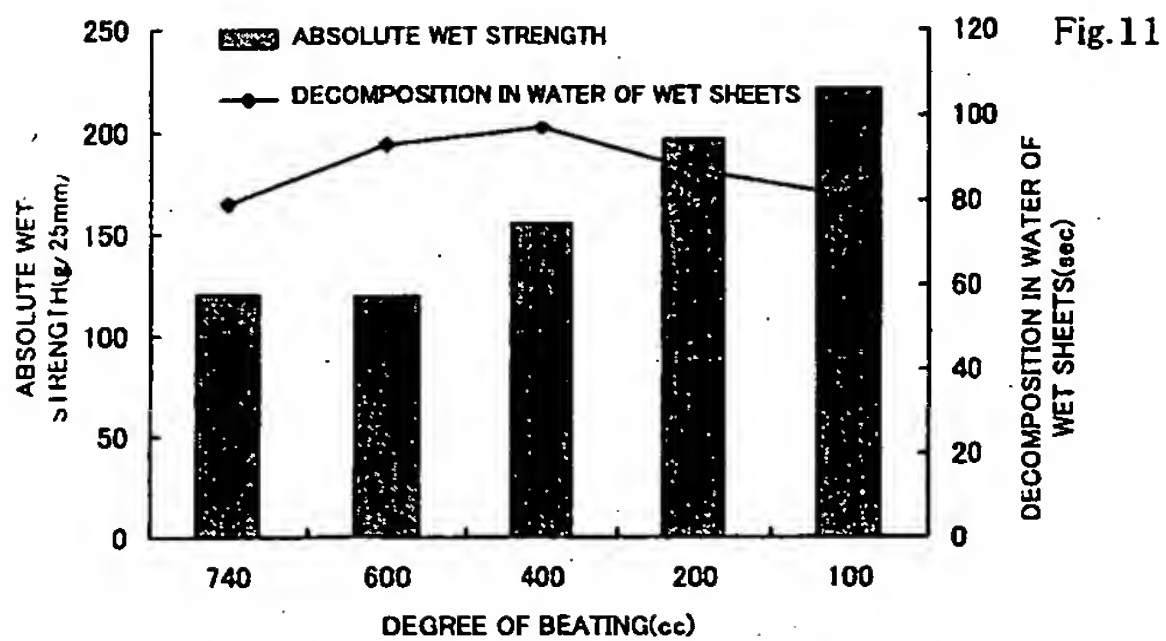

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 30 0647

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (InCL7)
A	GB 687 041 A (AMERICAN VISCOSE CORPORATION) 4 February 1953 (1953-02-04) * the whole document *		D21H13/08
A	US 3 785 918 A (KAWAI A ET AL) 15 January 1974 (1974-01-15) * column 2, line 24 - column 3, line 30; claims *		
A	US 3 563 241 A (SHAMBELAN CHARLES ET AL) 16 February 1971 (1971-02-16)		
A	FR 1 423 789 A (COMPAGNIE INDUSTRIELLE DE TEXTILES ARTIFICIELS & SYNTHETIQUES) 24 March 1966 (1966-03-24)		
			TECHNICAL FIELDS SEARCHED (InCL7)
			D21H
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 9 May 2000	Examiner Songy, O
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons A : member of the same patent family, corresponding document</p>			

EPO FORM 1603 (01.01.2001)

EP 1 024 225 A1

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 30 0647

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

09-05-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 687041 A		BE 501703 A IT 474414 A NL 159862 B	
US 3785918 A	15-01-1974	JP 49001241 B DE 2052224 A GB 1300820 A	12-01-1974 13-05-1971 20-12-1972
US 3563241 A	16-02-1971	NONE	
FR 1423789 A	24-03-1966	BE 670968 A CH 478955 A NL 298220 A, B	31-01-1966 30-09-1969

EP 00 30 0647

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82